

FIG. 1A

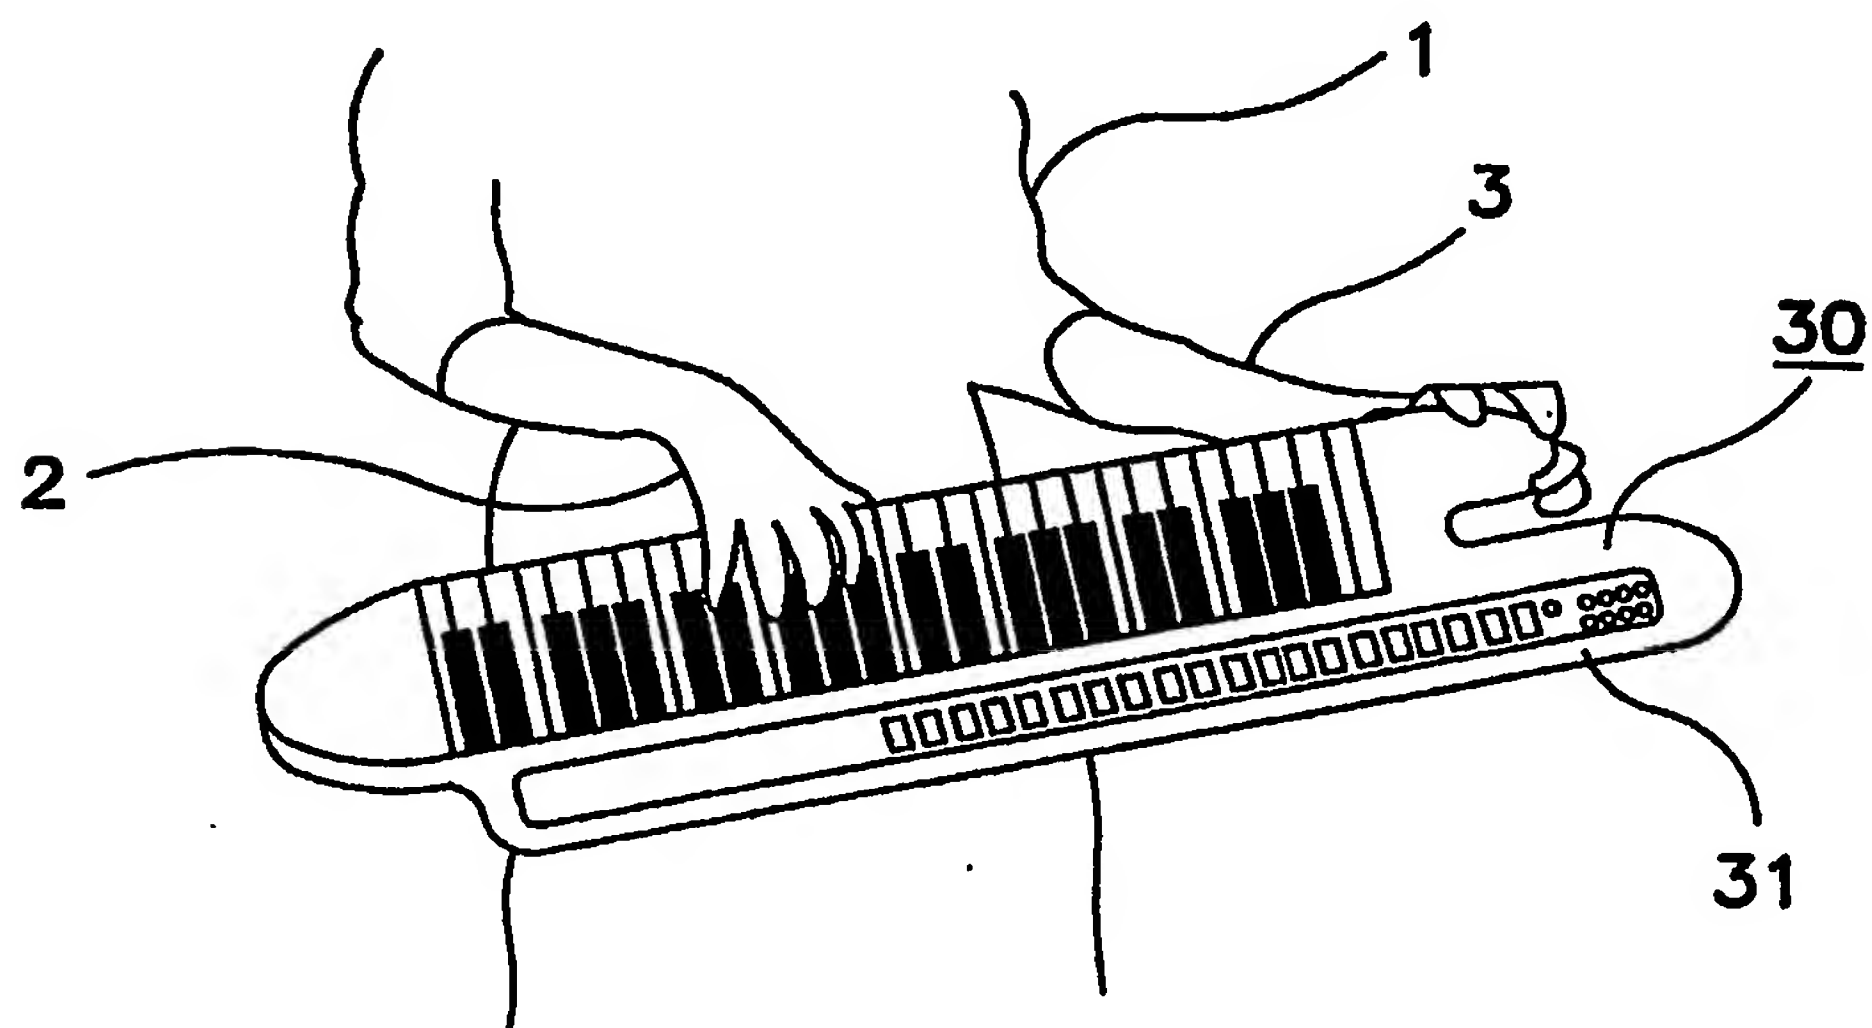


FIG. 1

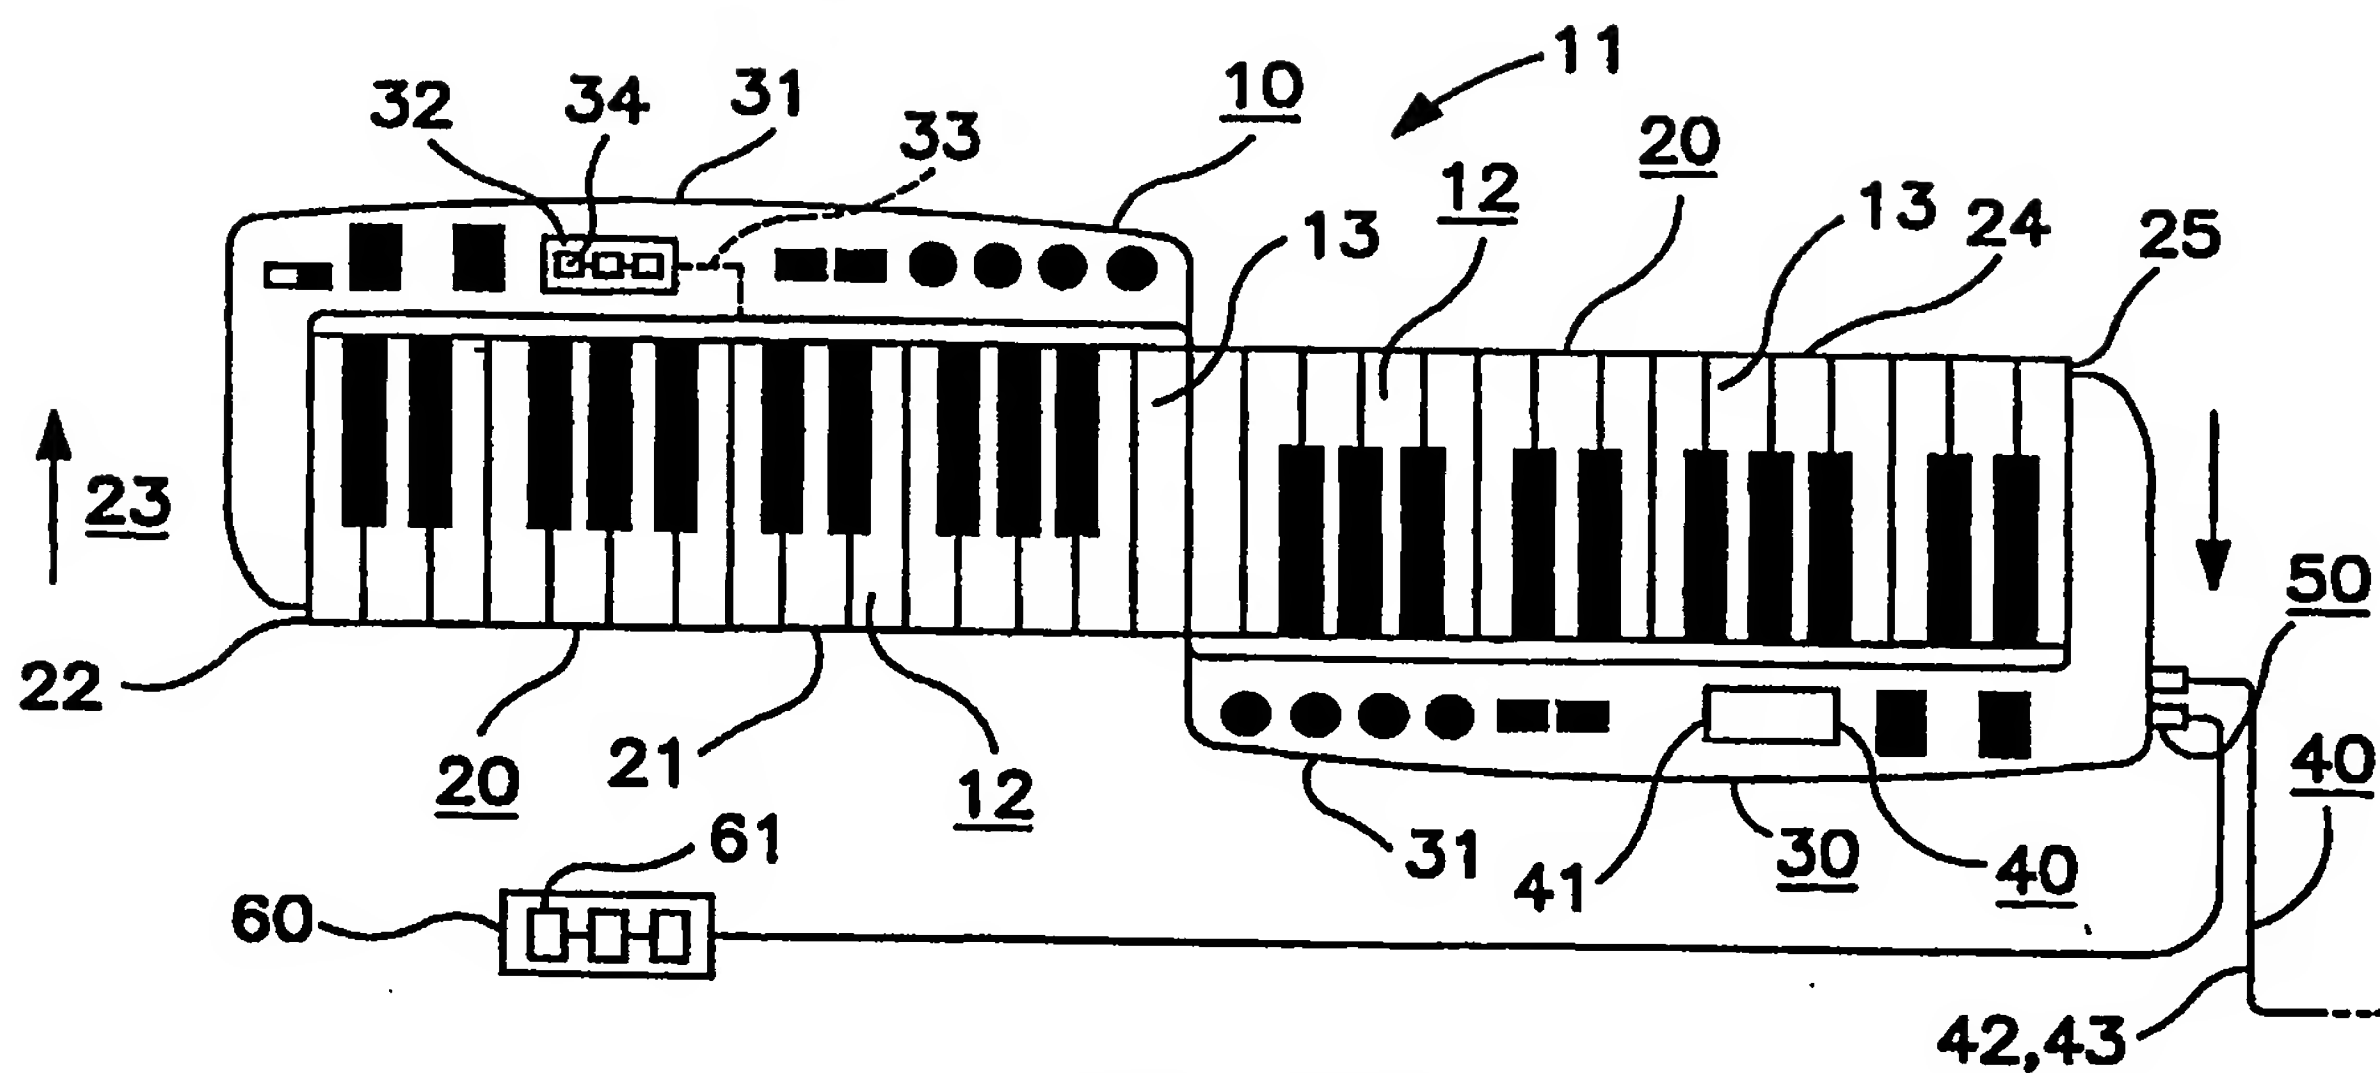


FIG. 2A

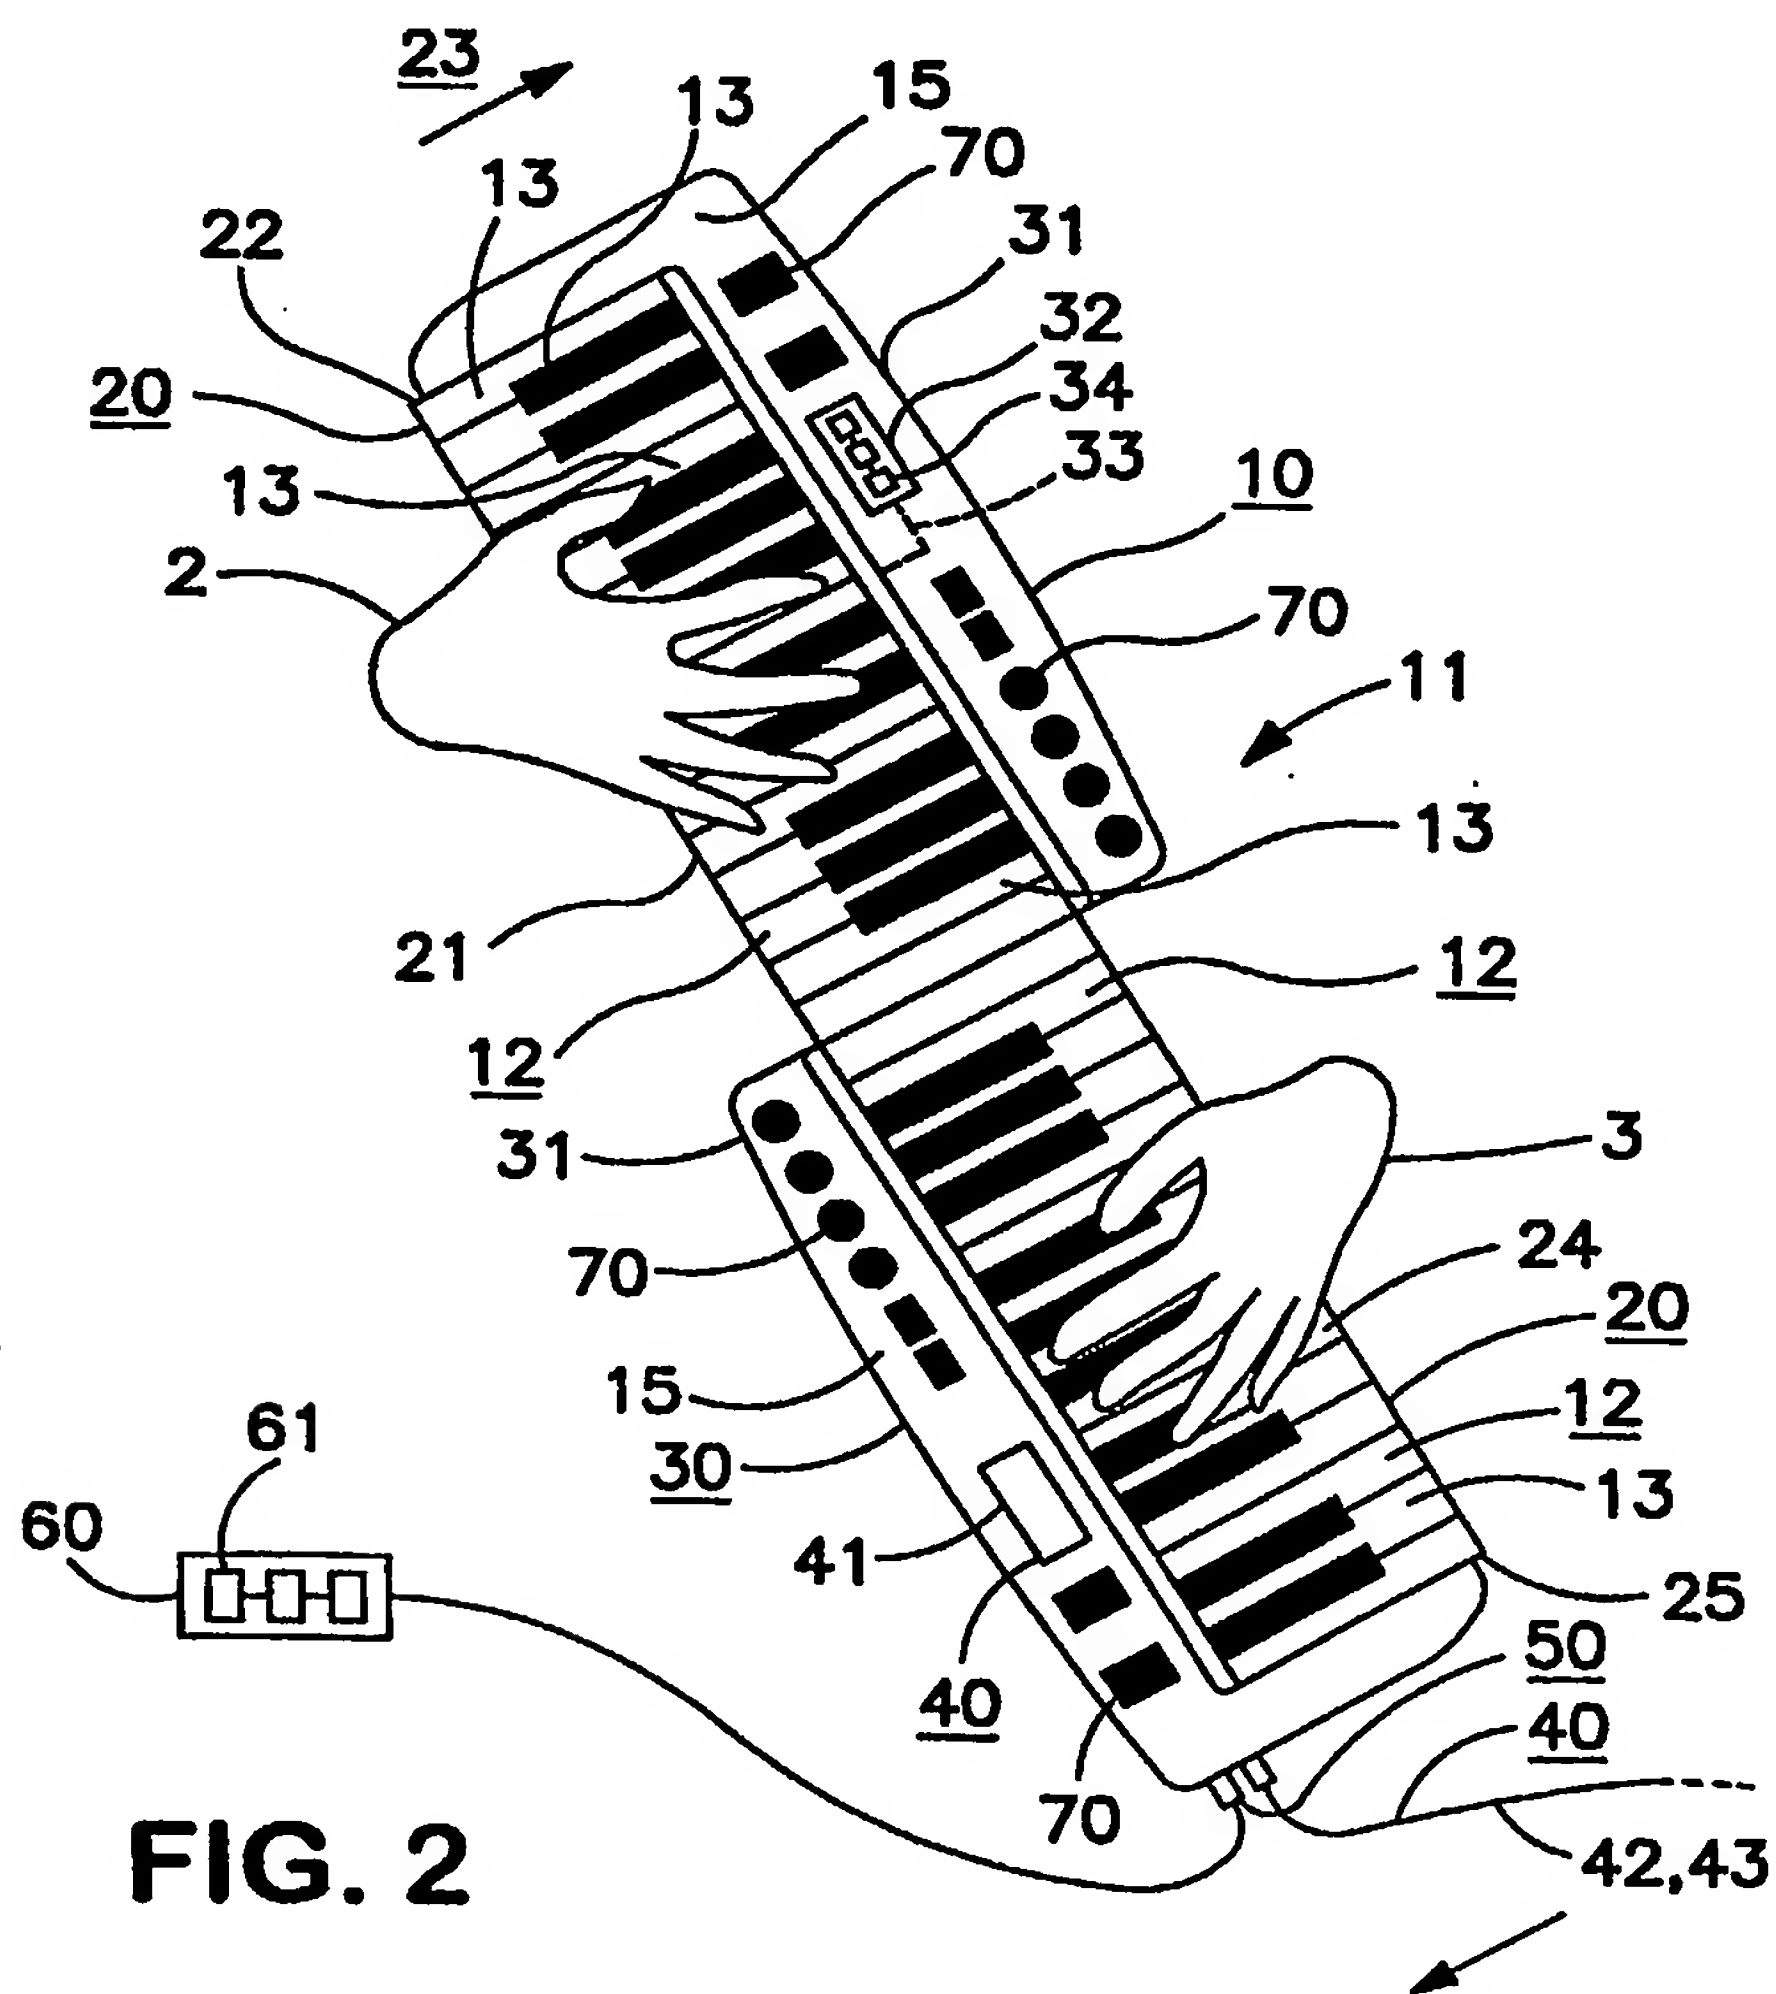


FIG. 2


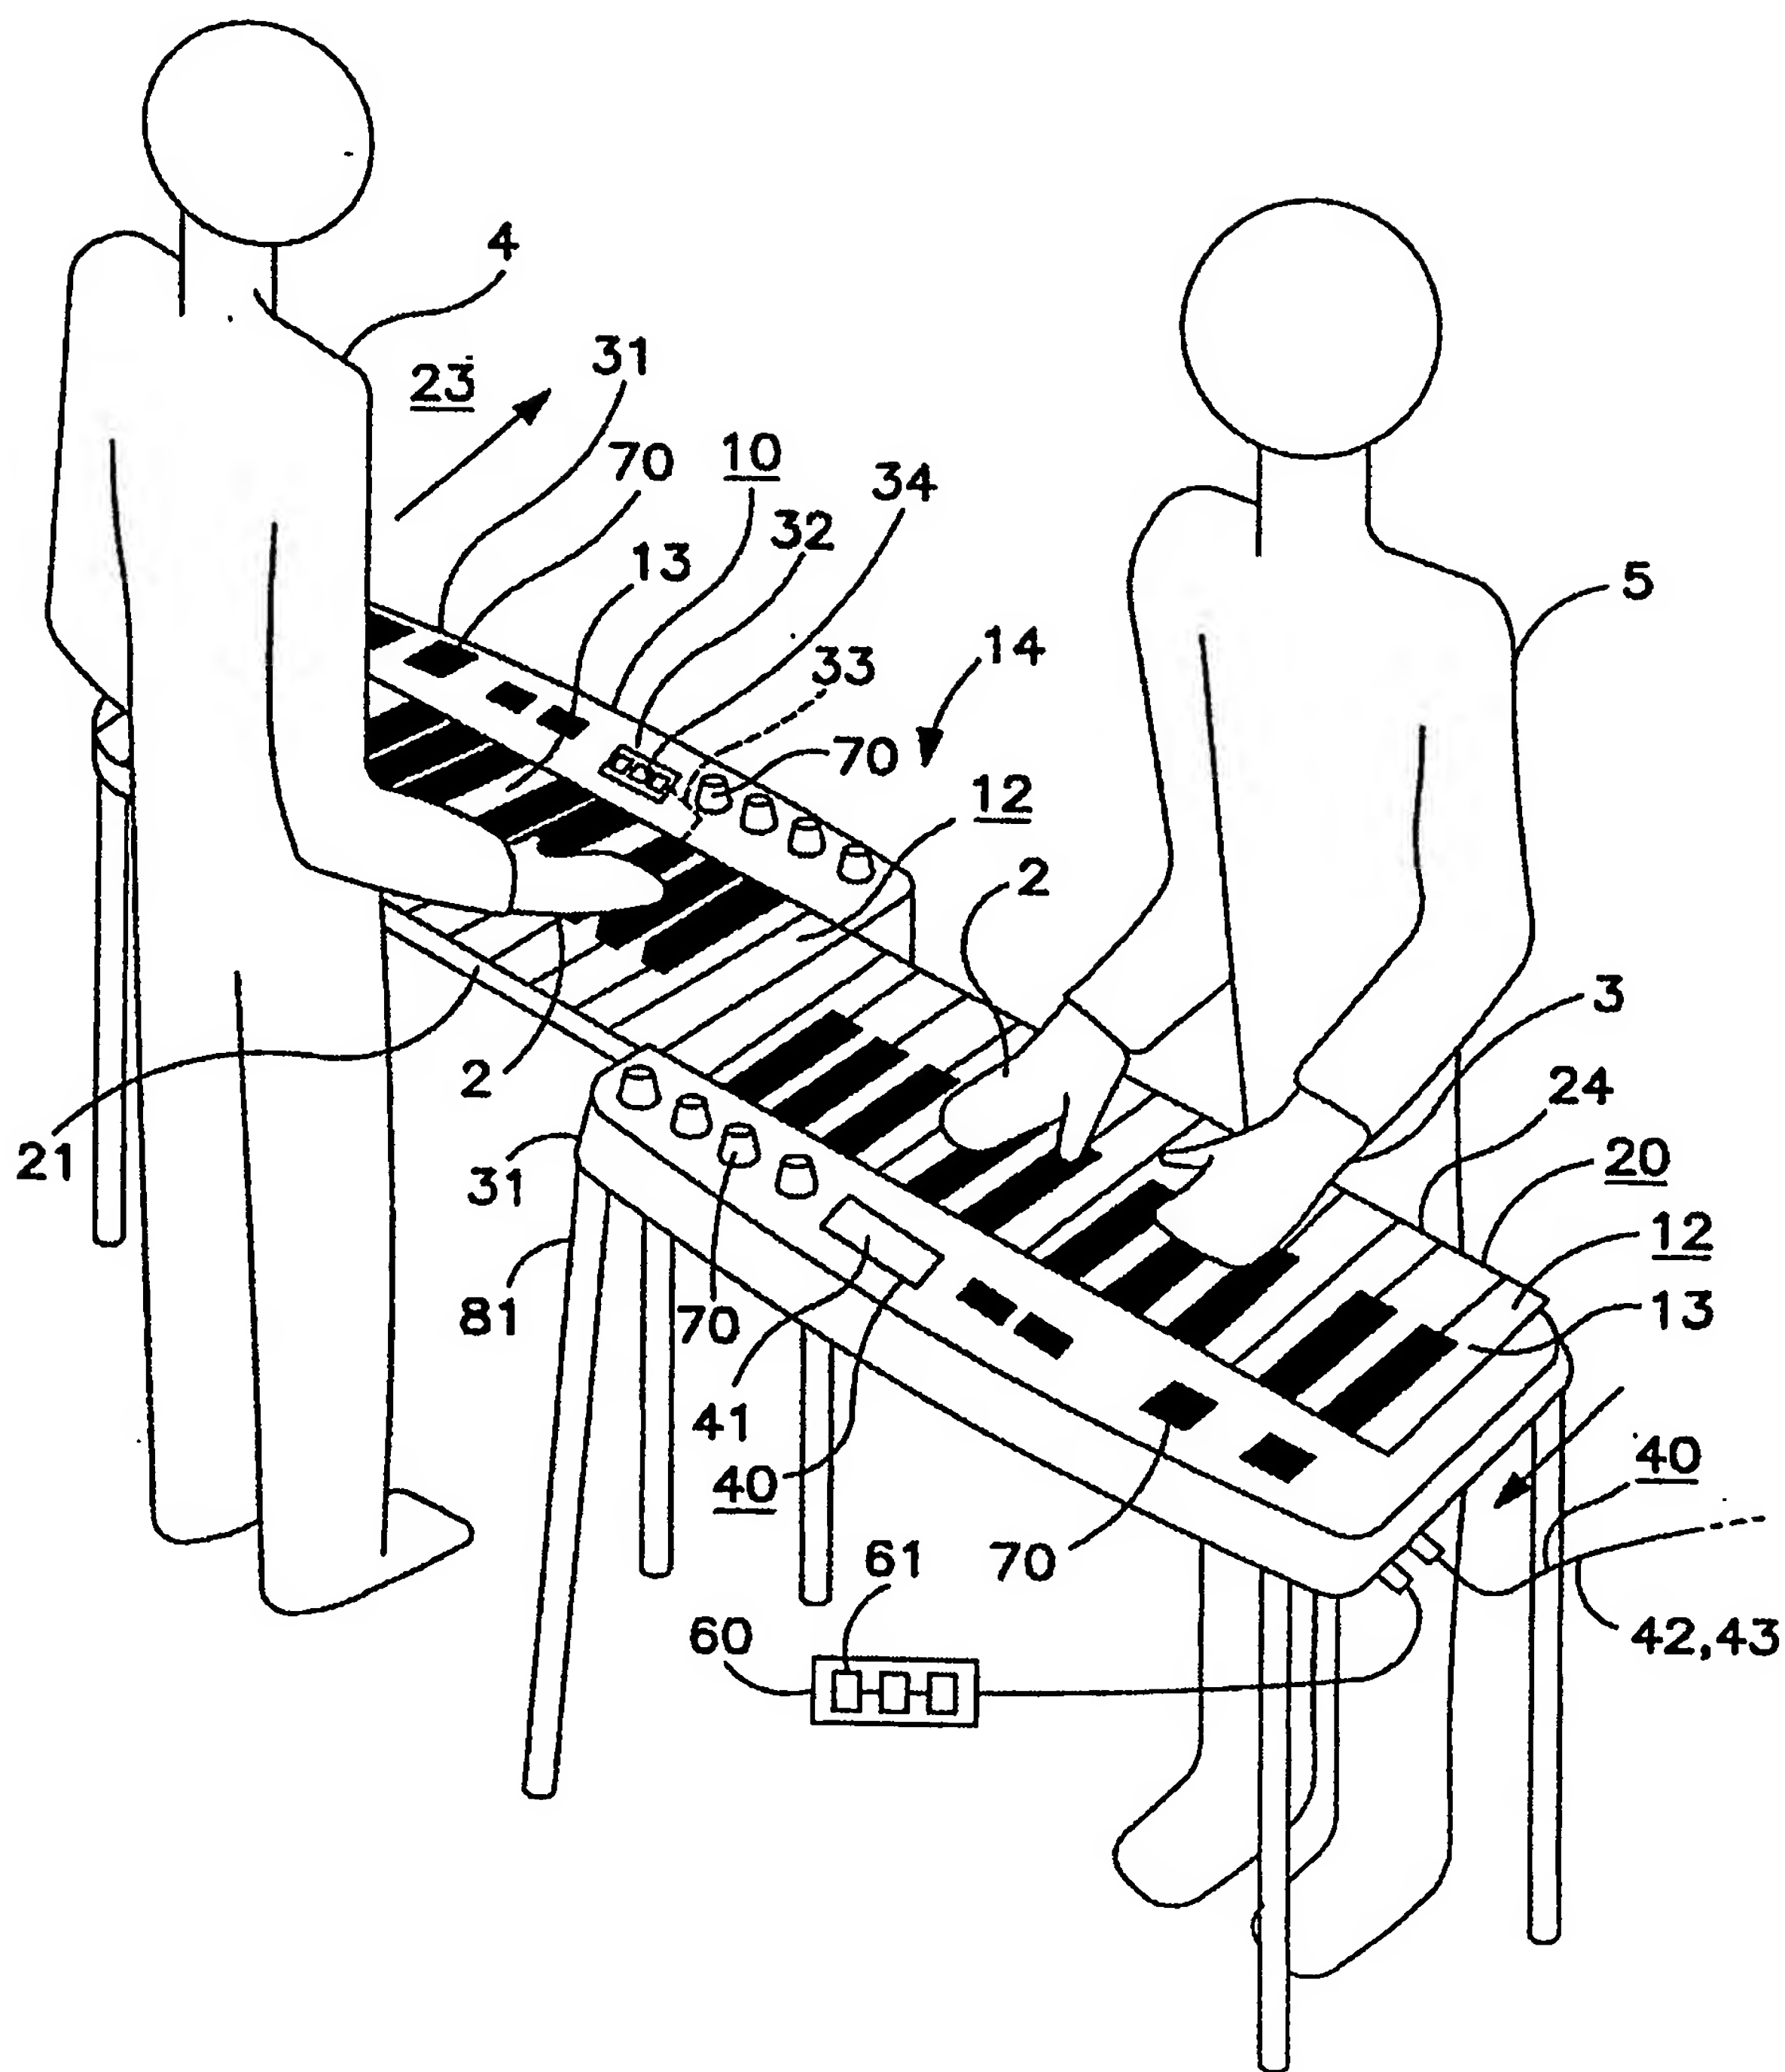


FIG. 3

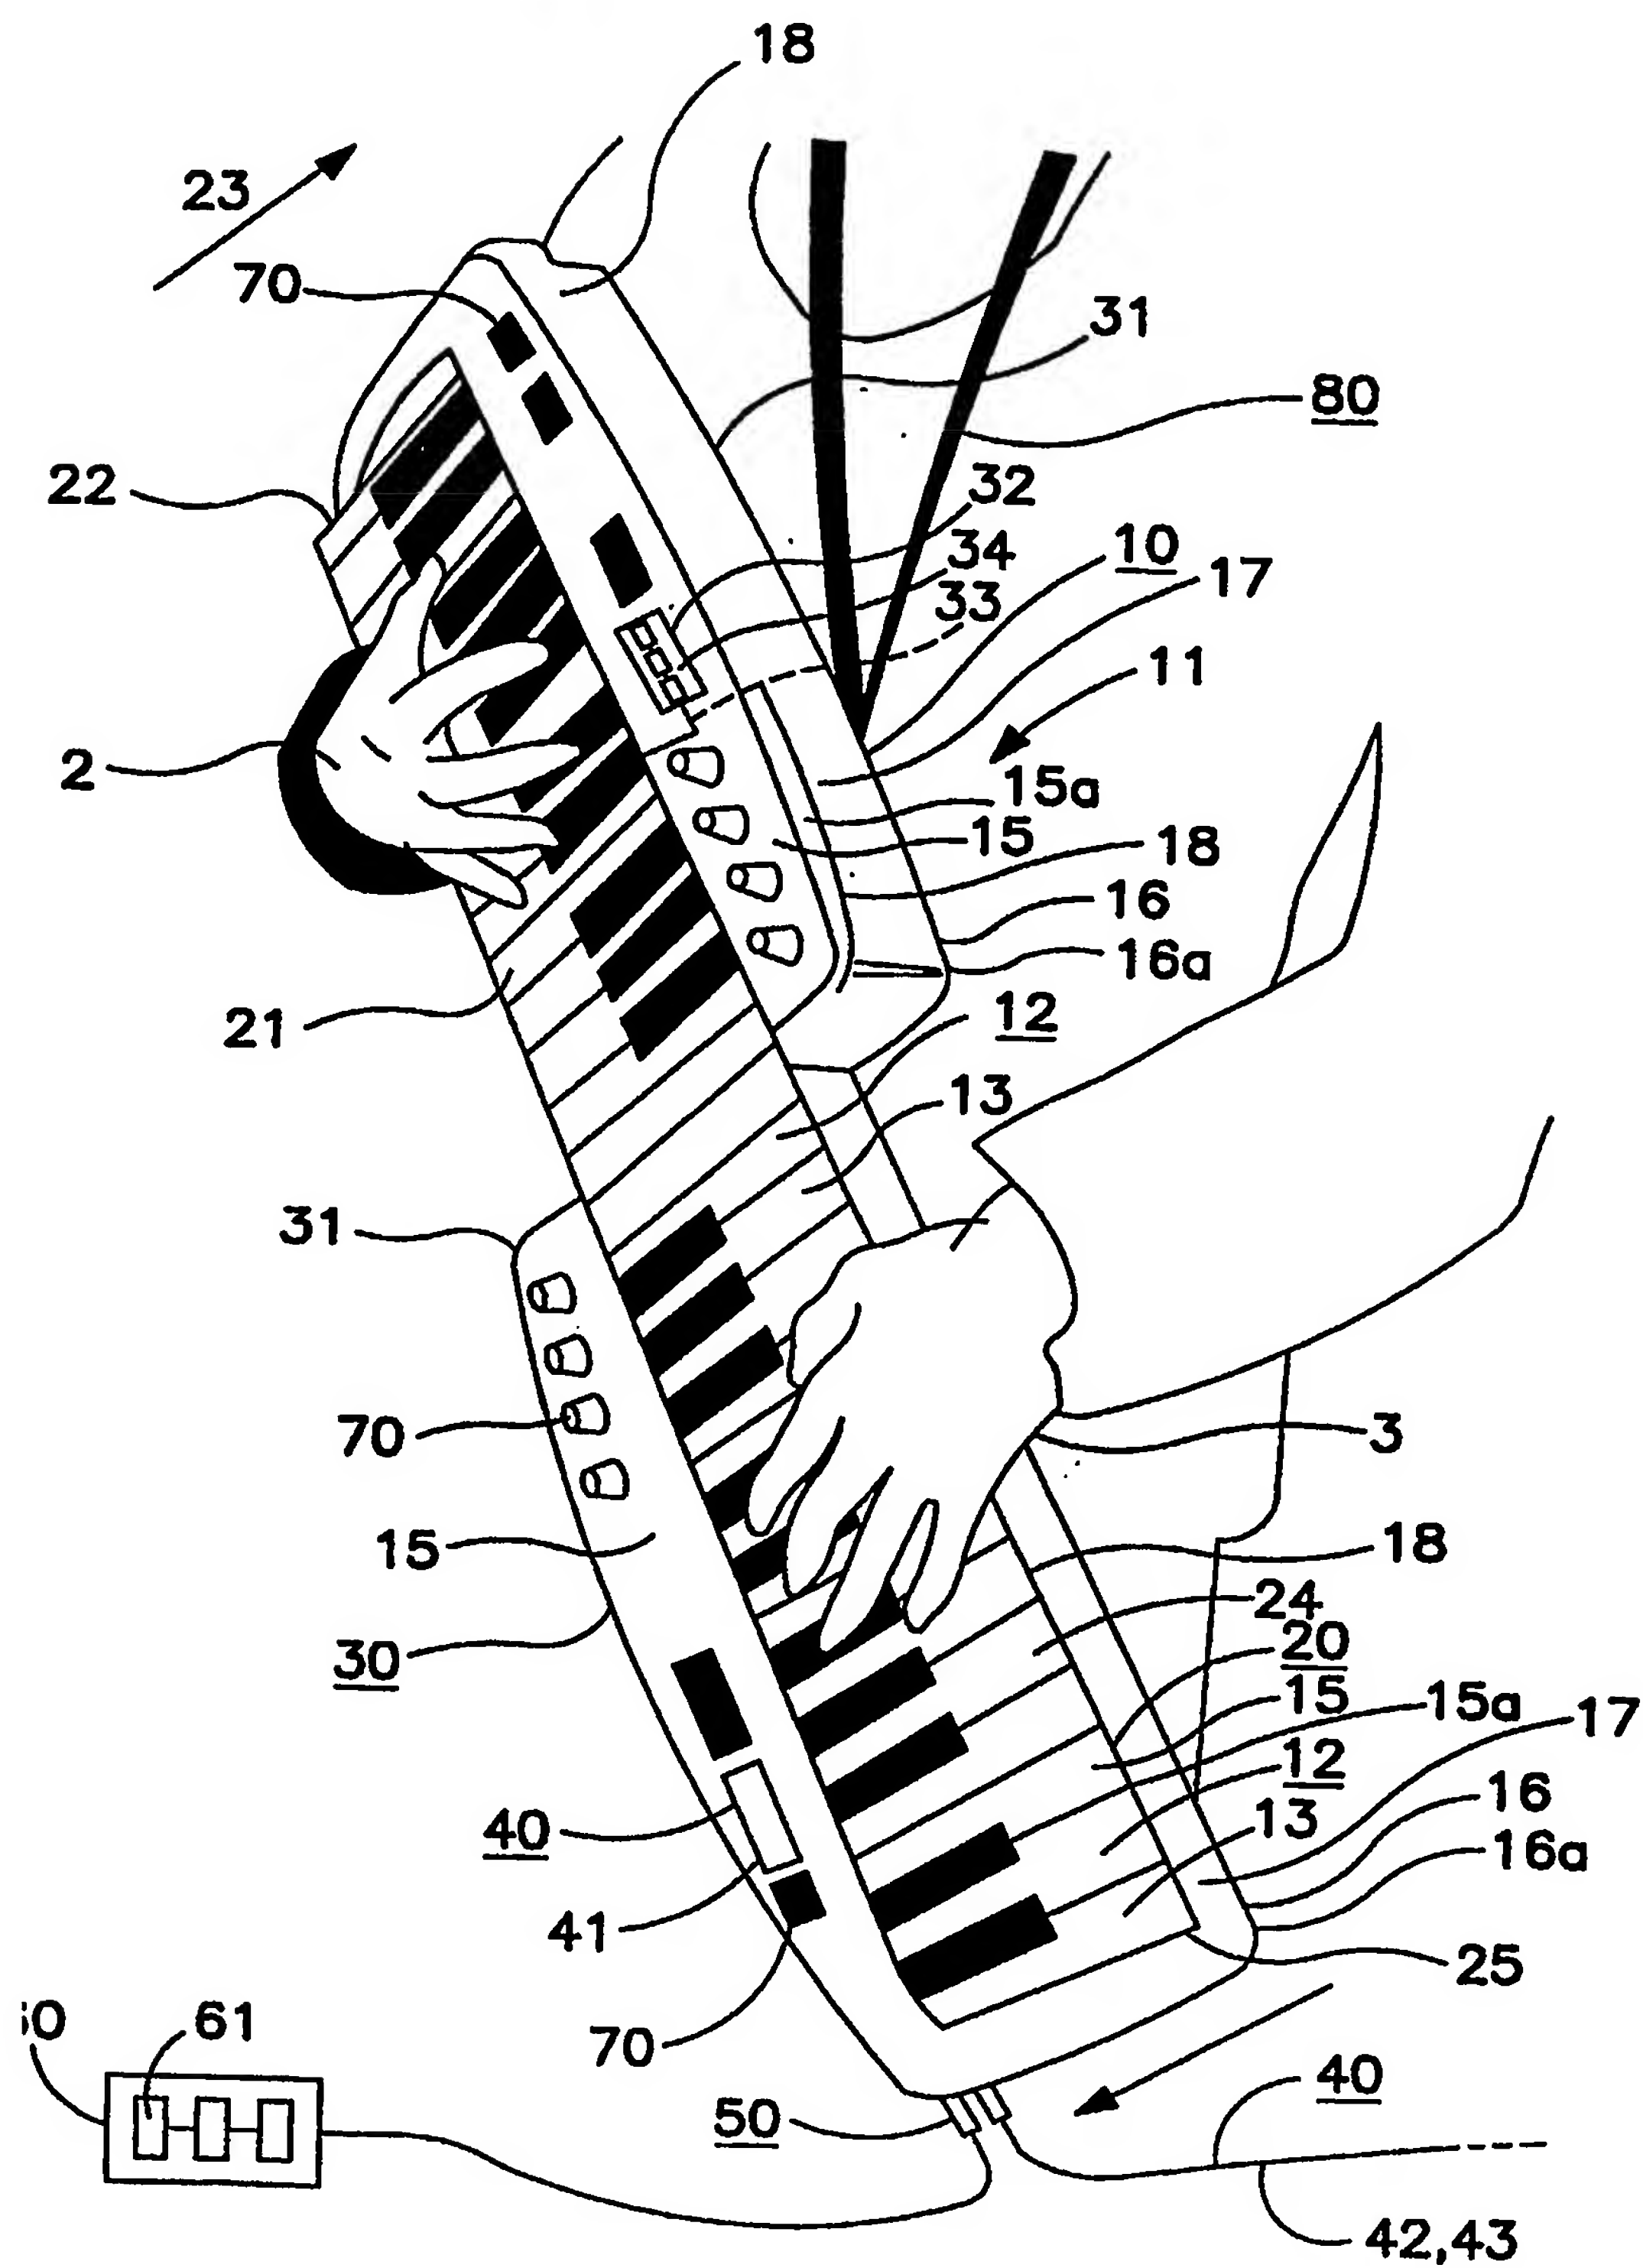

**FIG. 4**

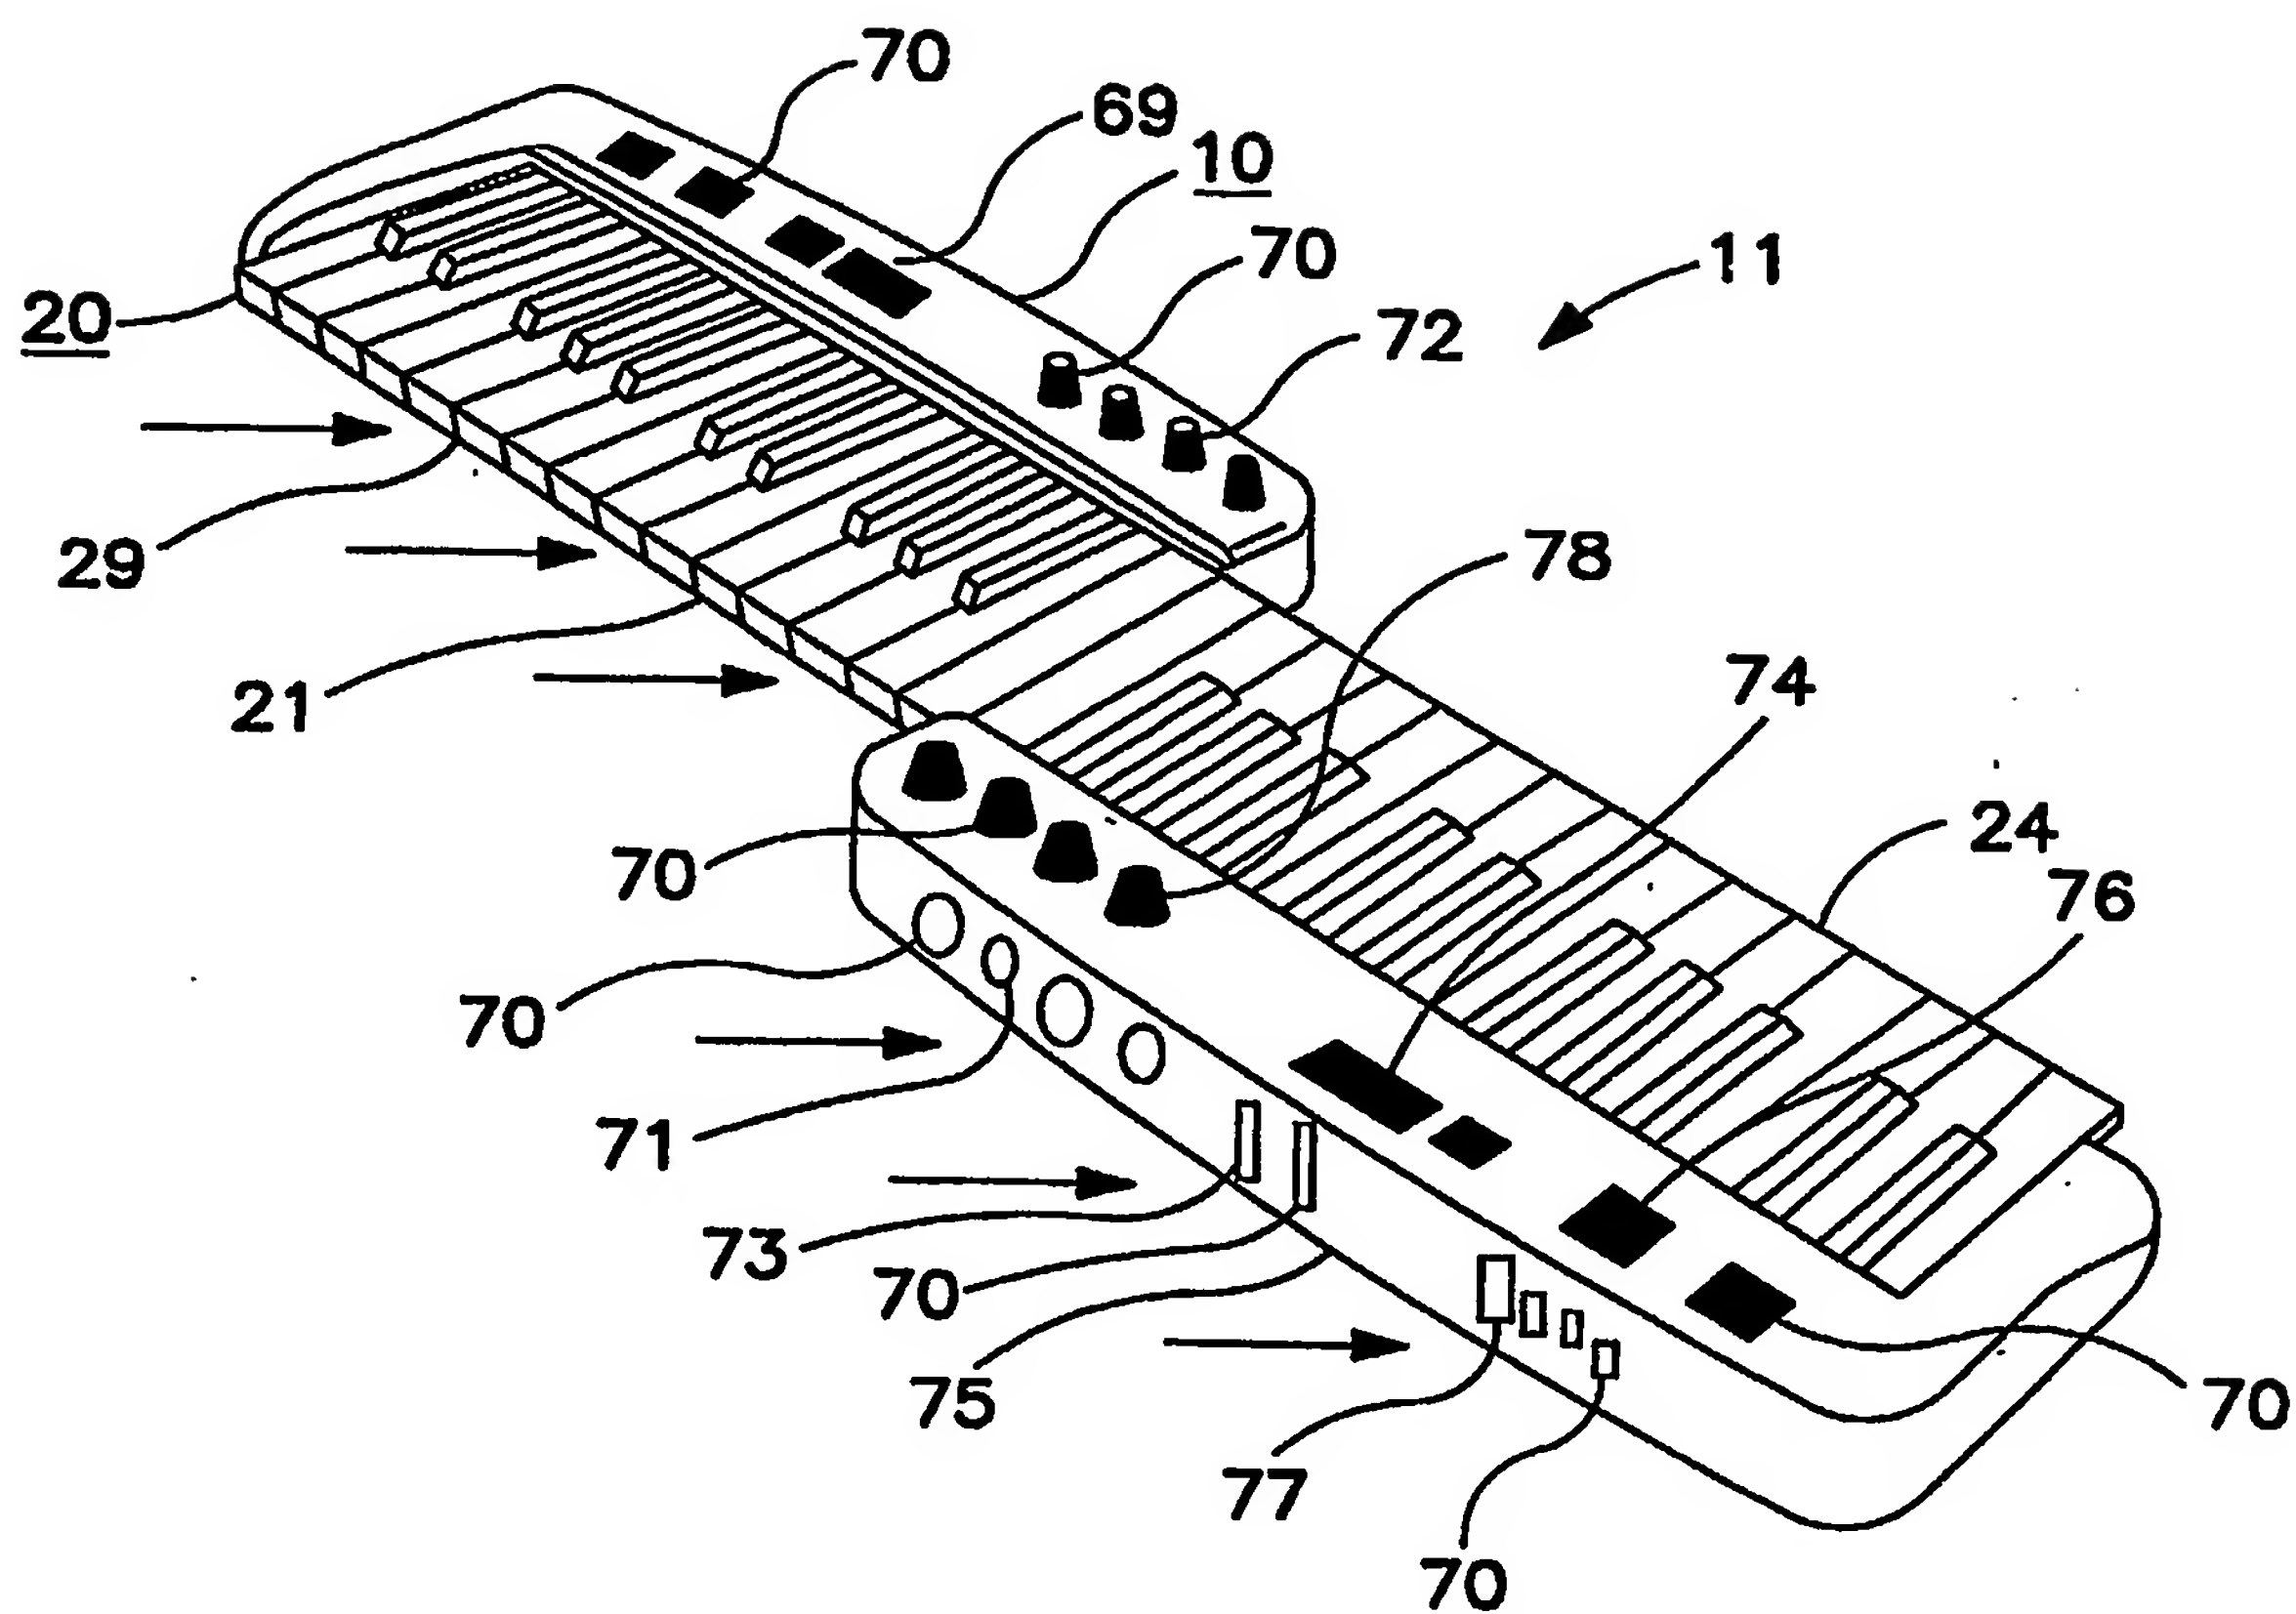


FIG. 5

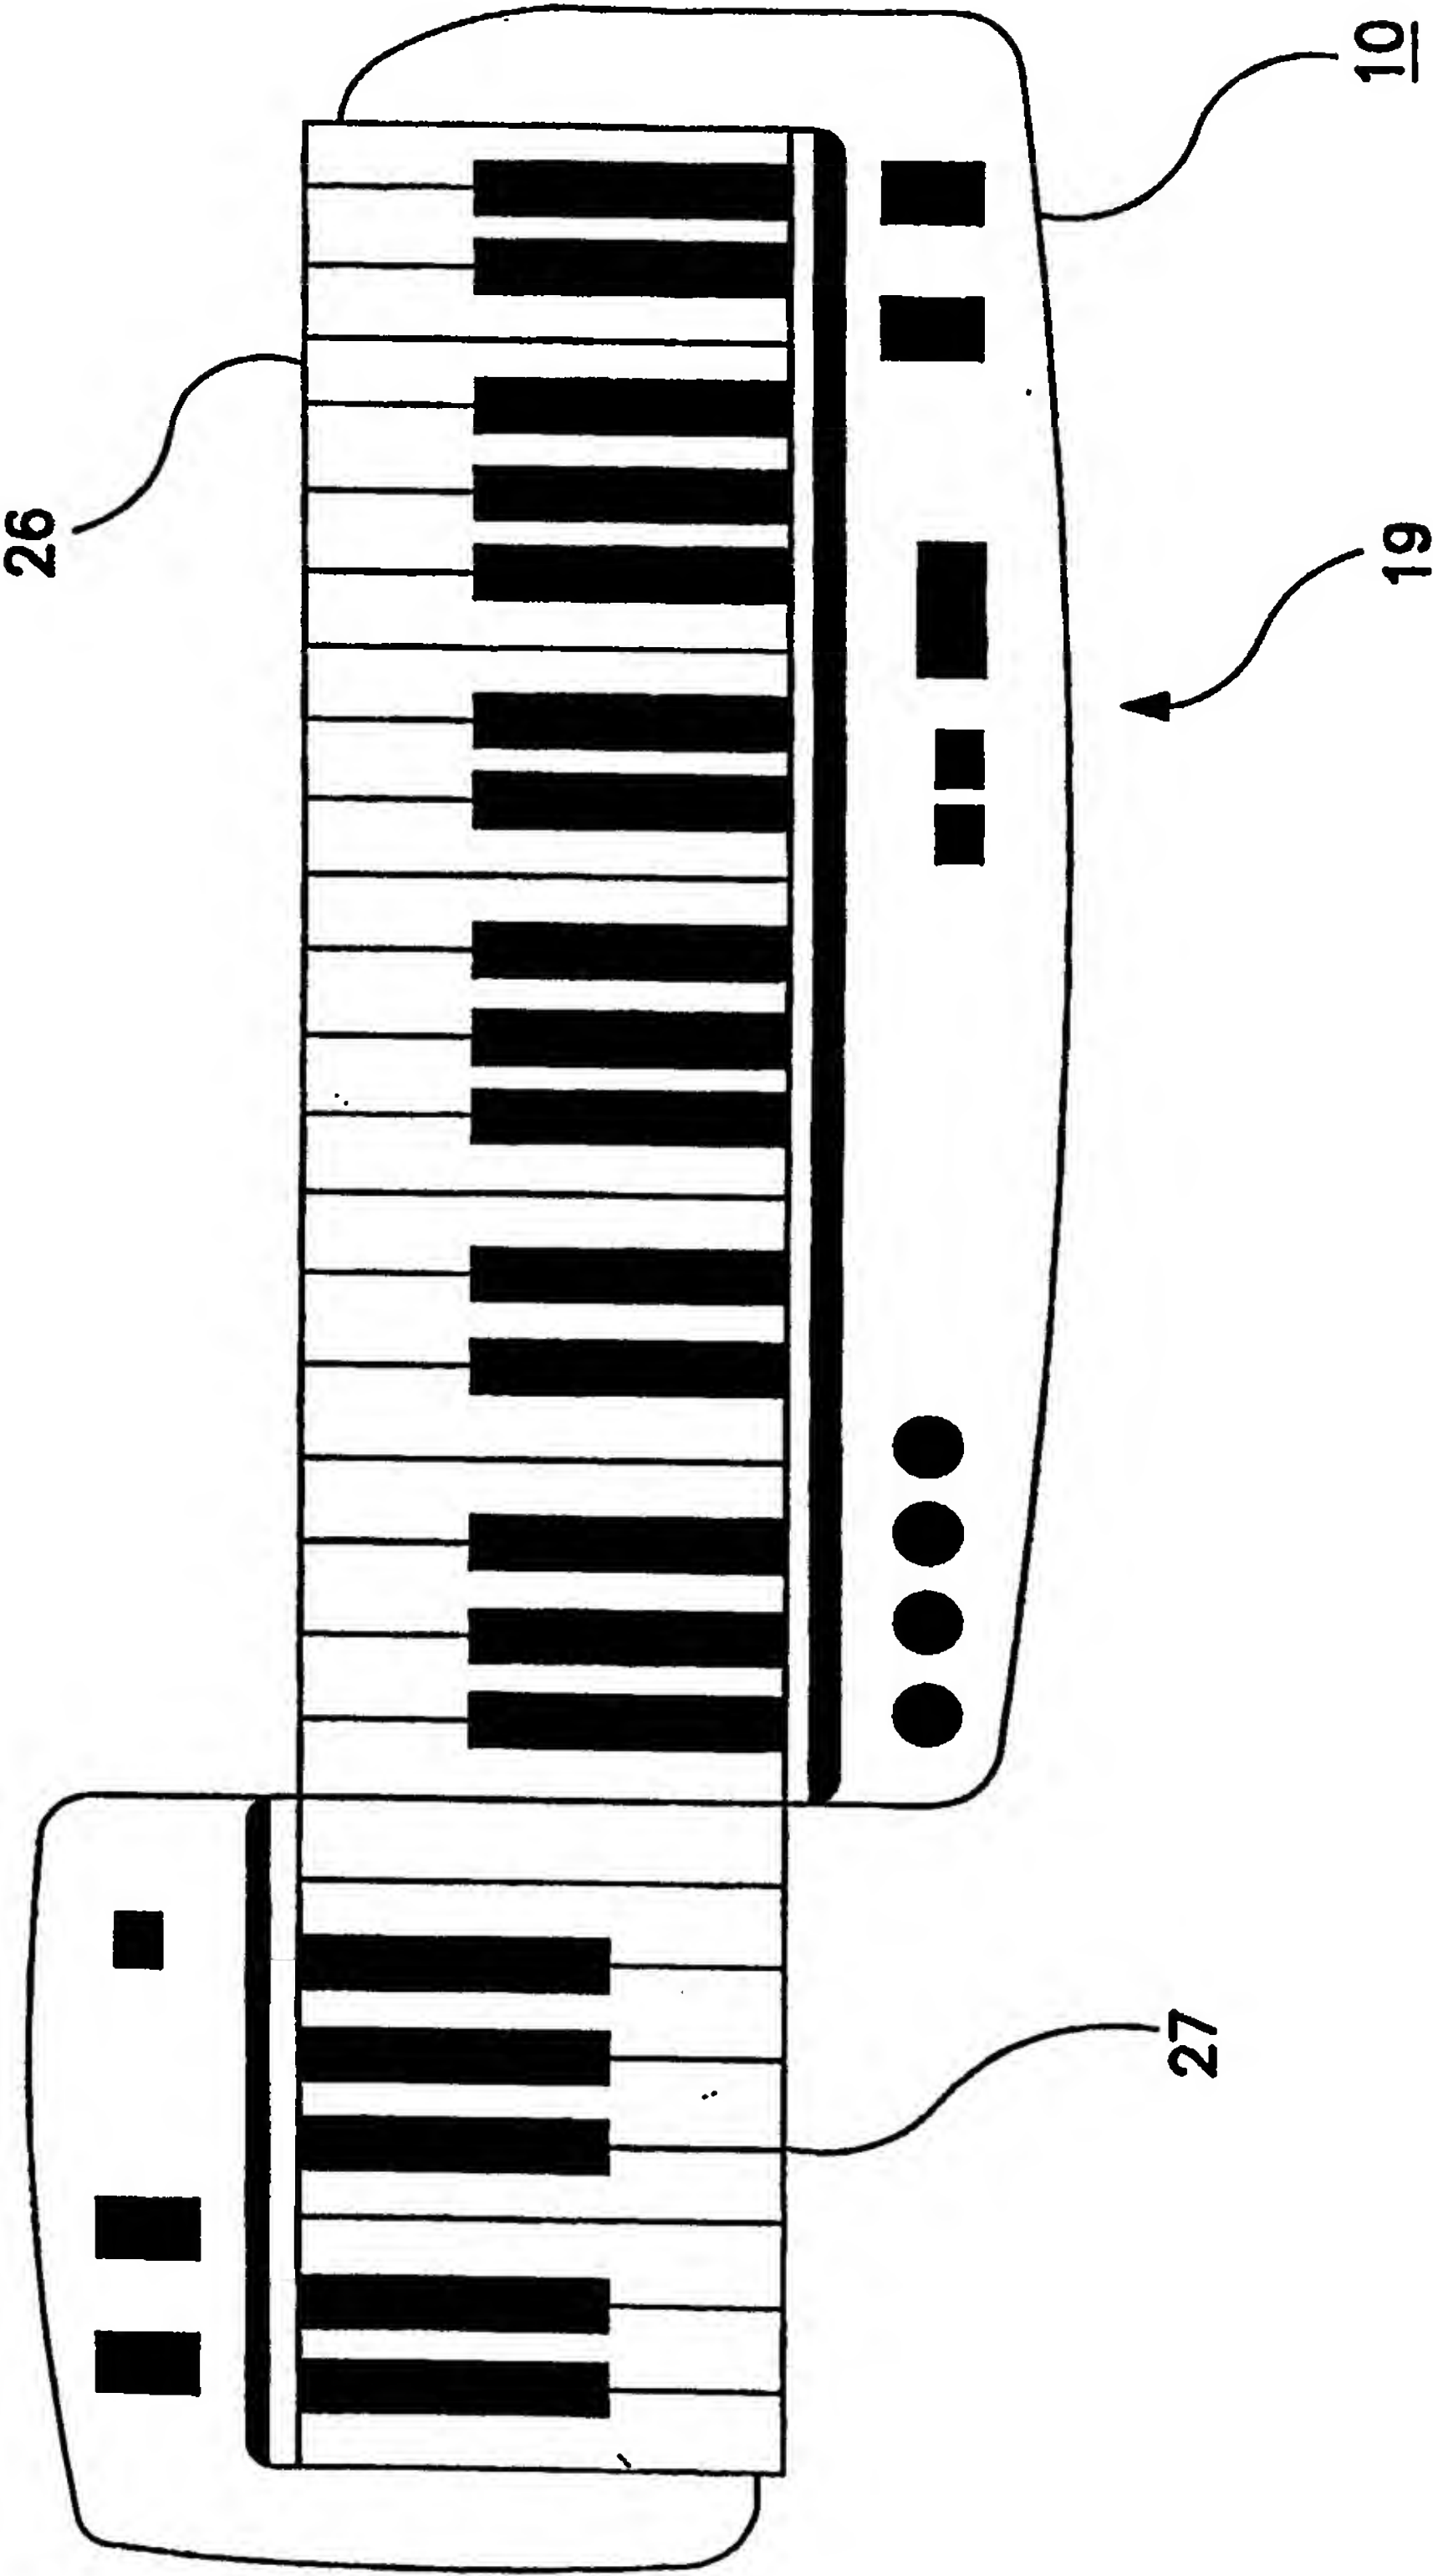


FIG. 6

7/13

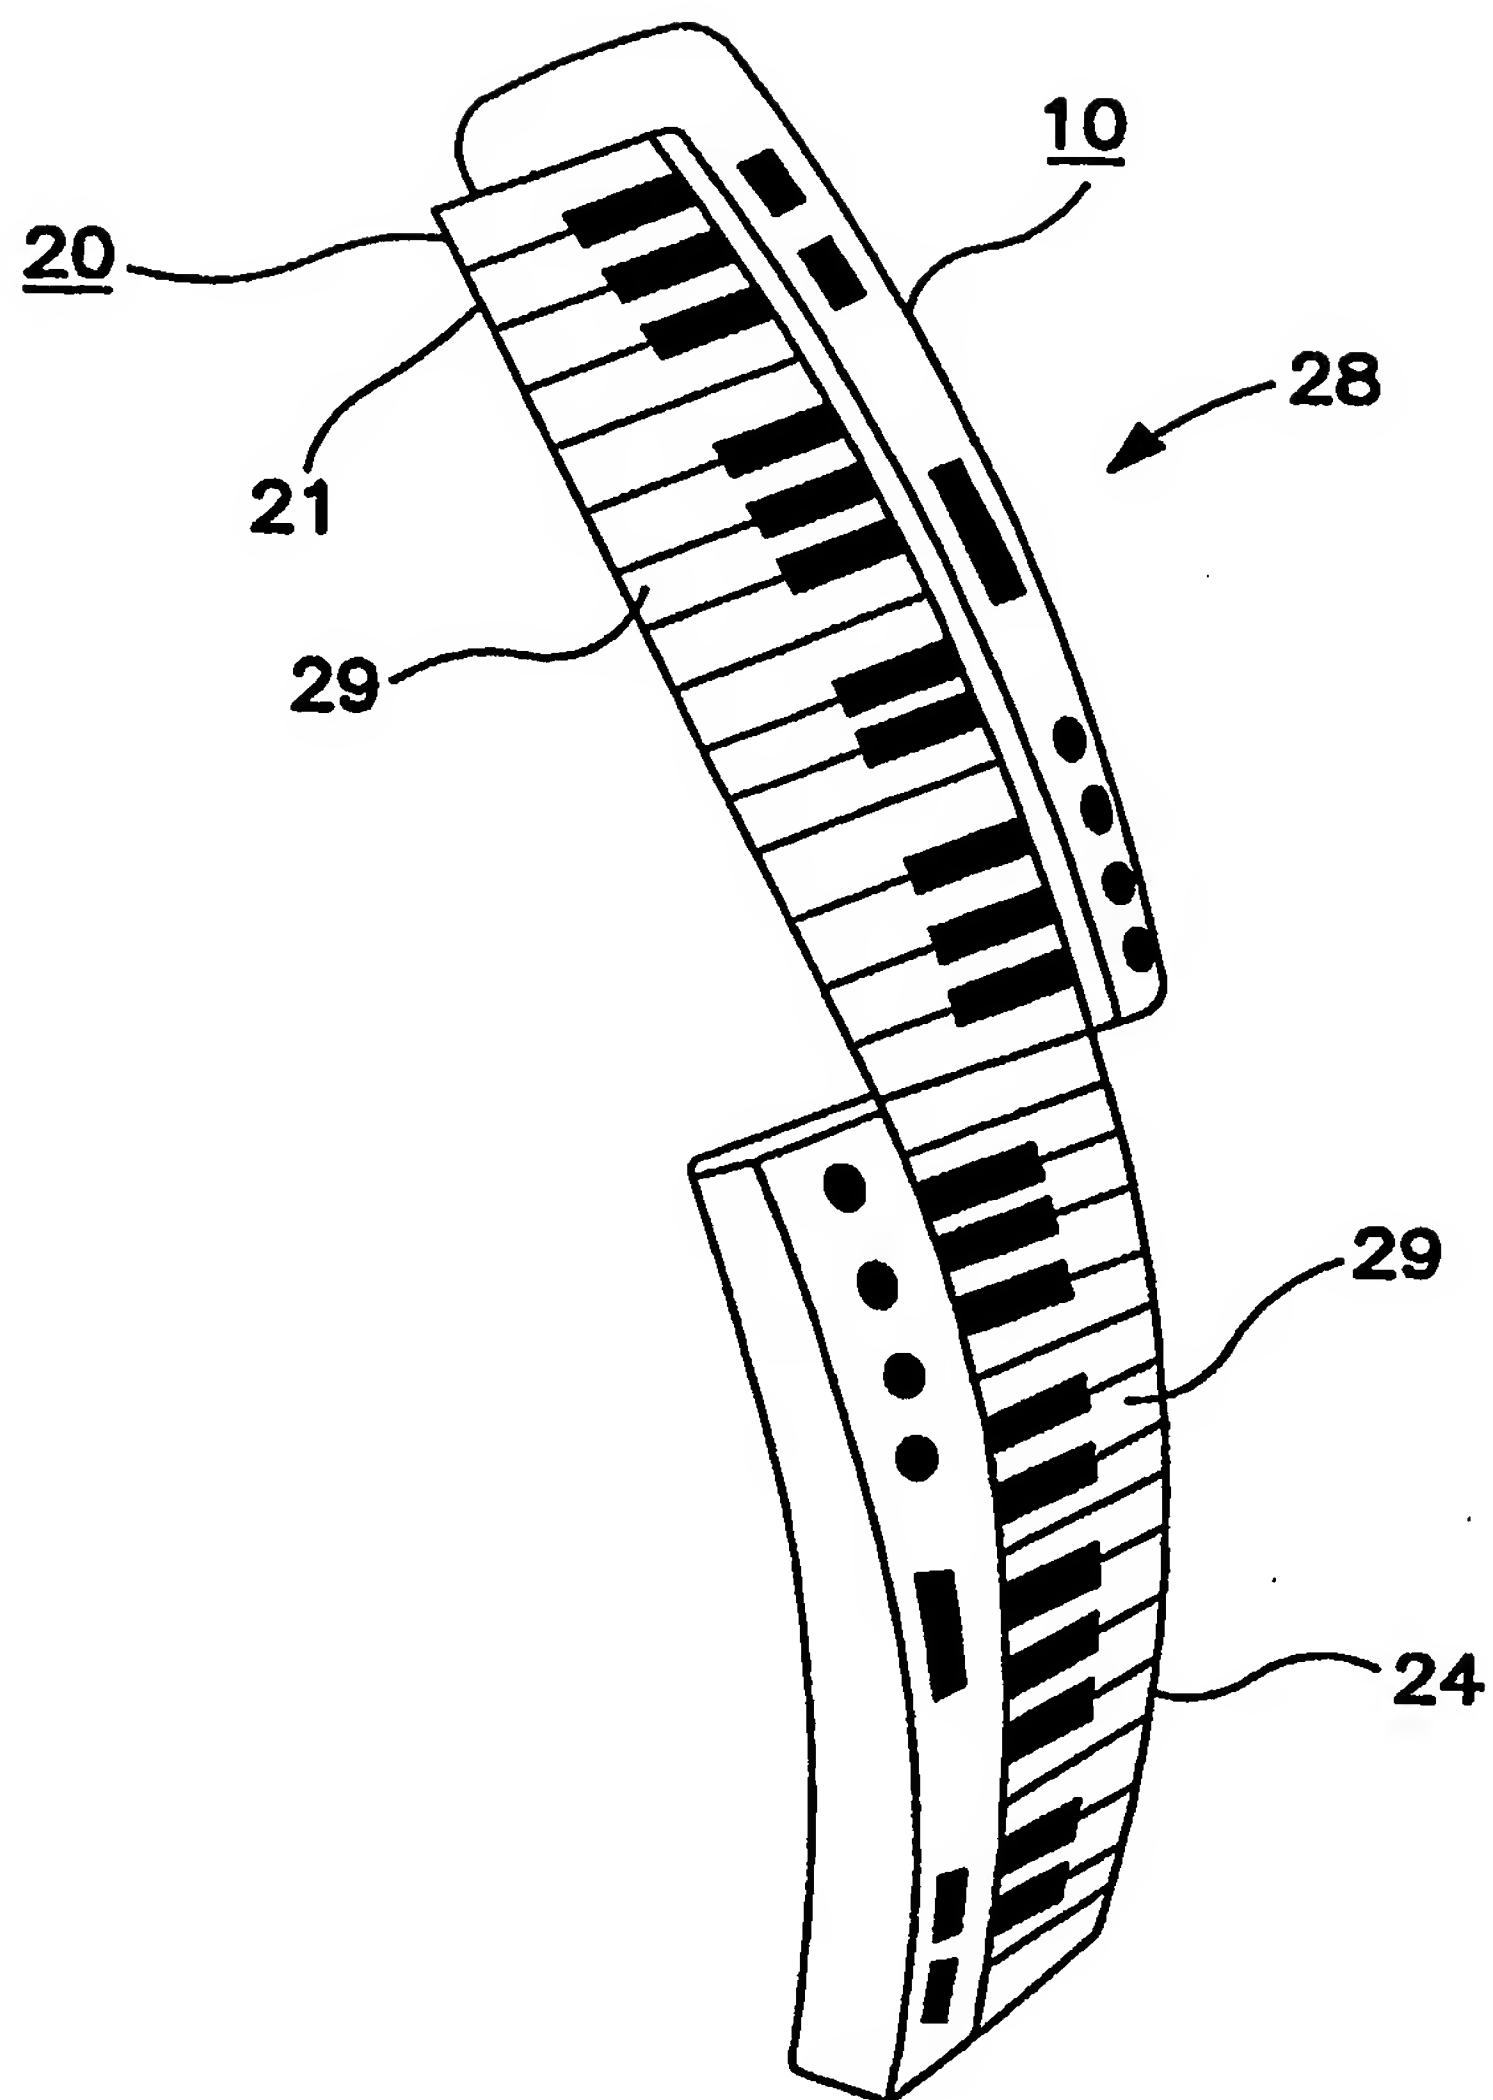


FIG. 7



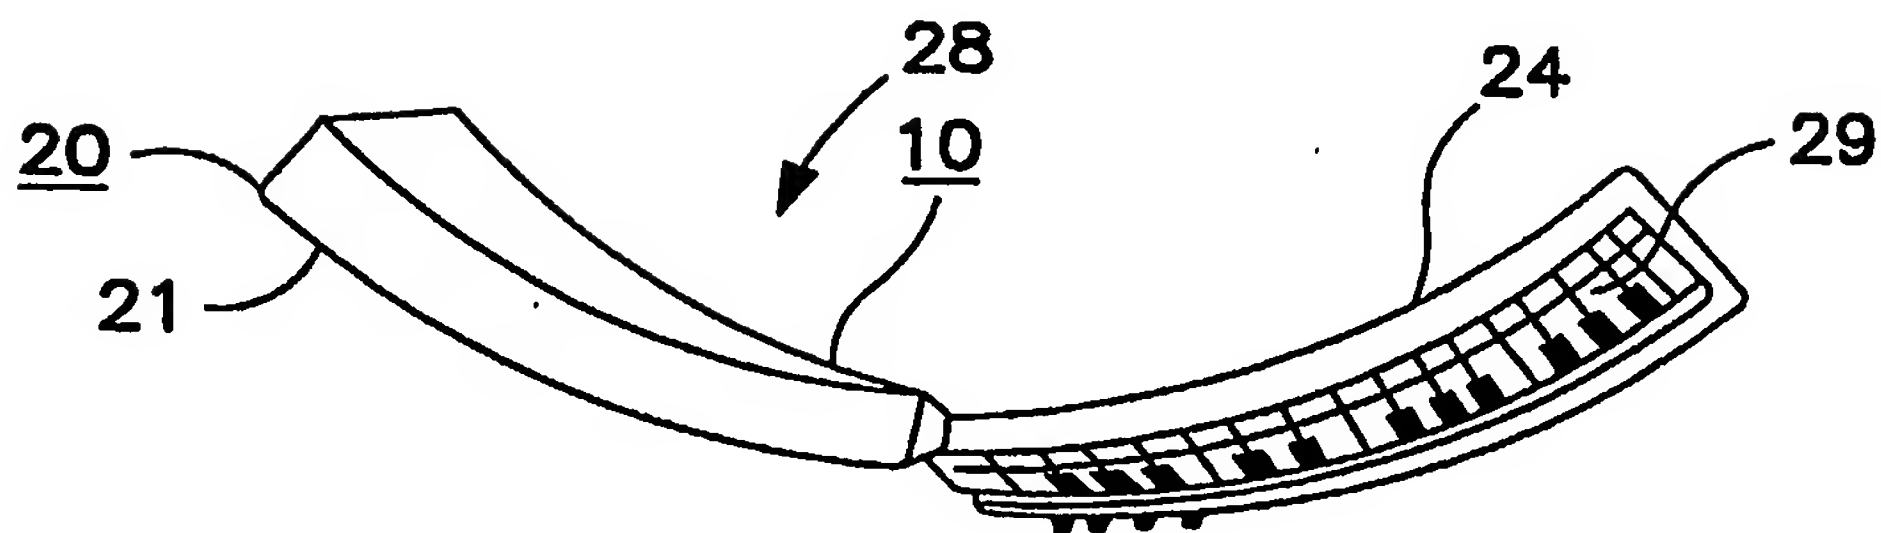



FIG. 7A

8/13

**FIG. 8**

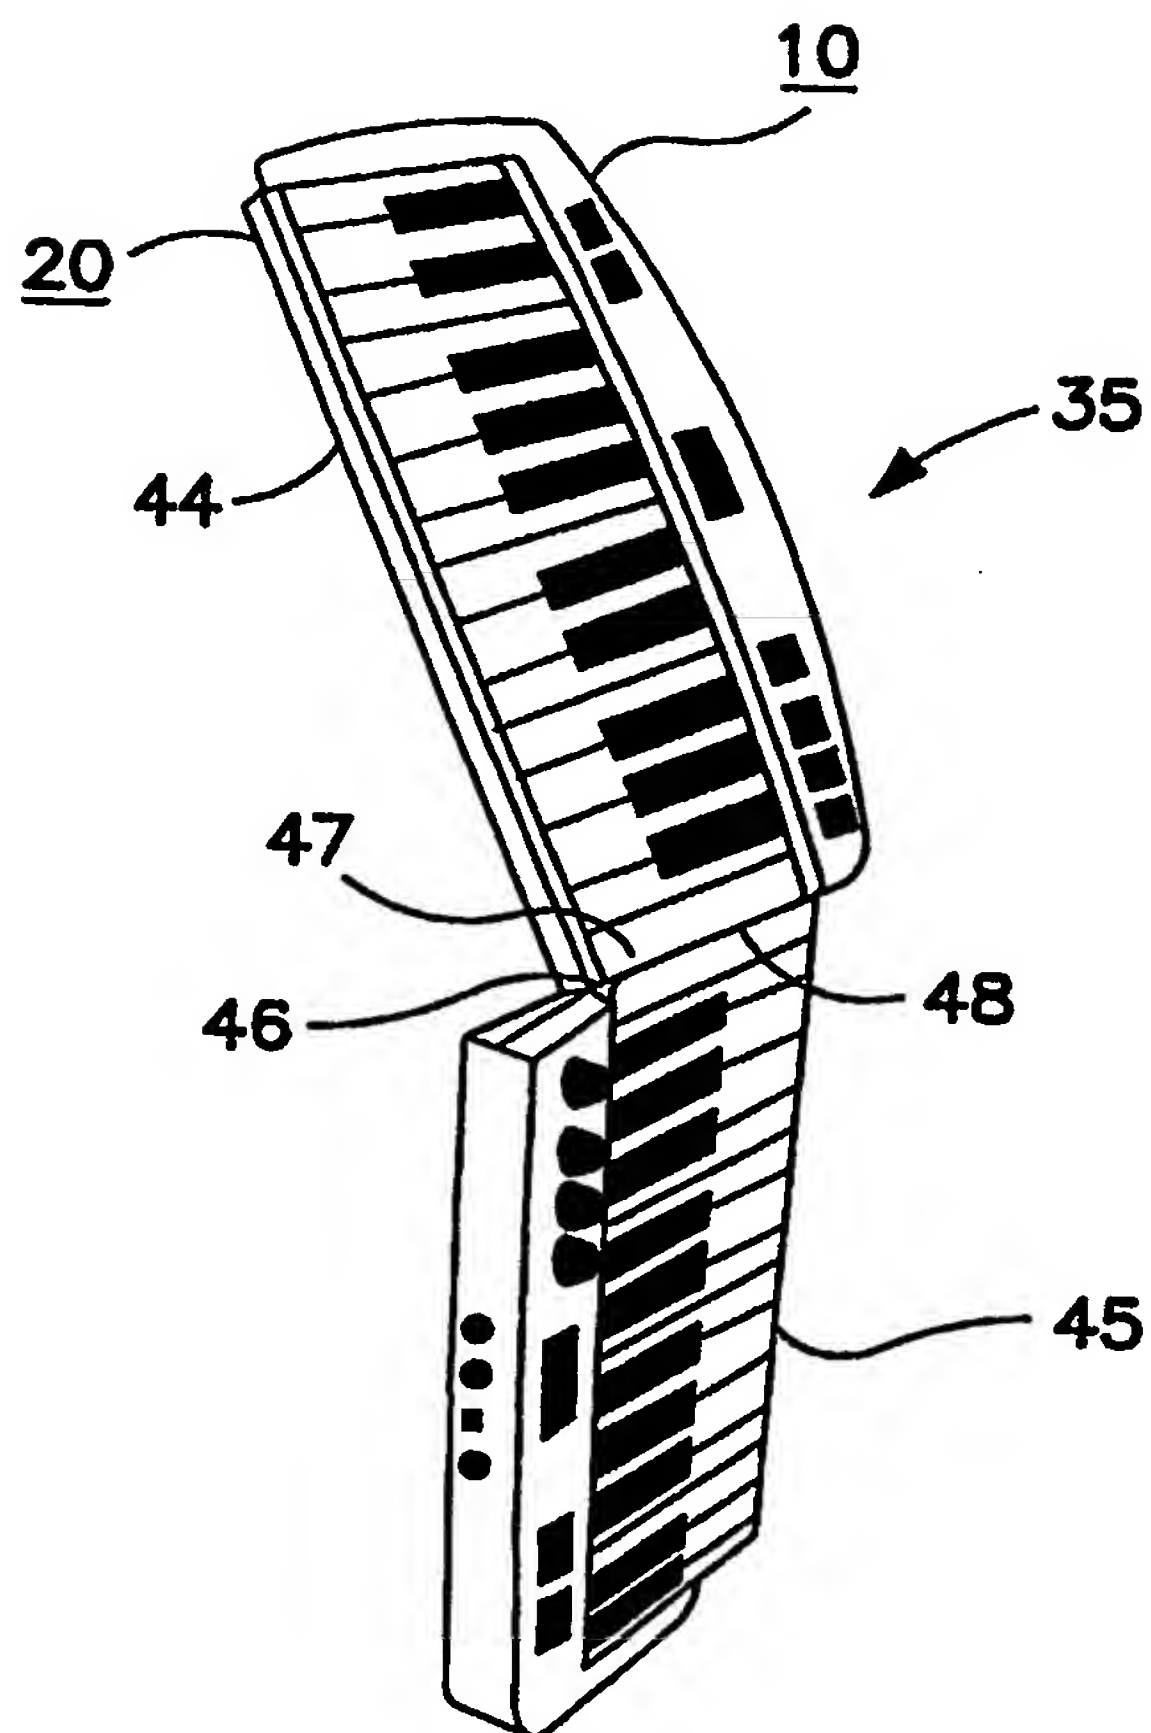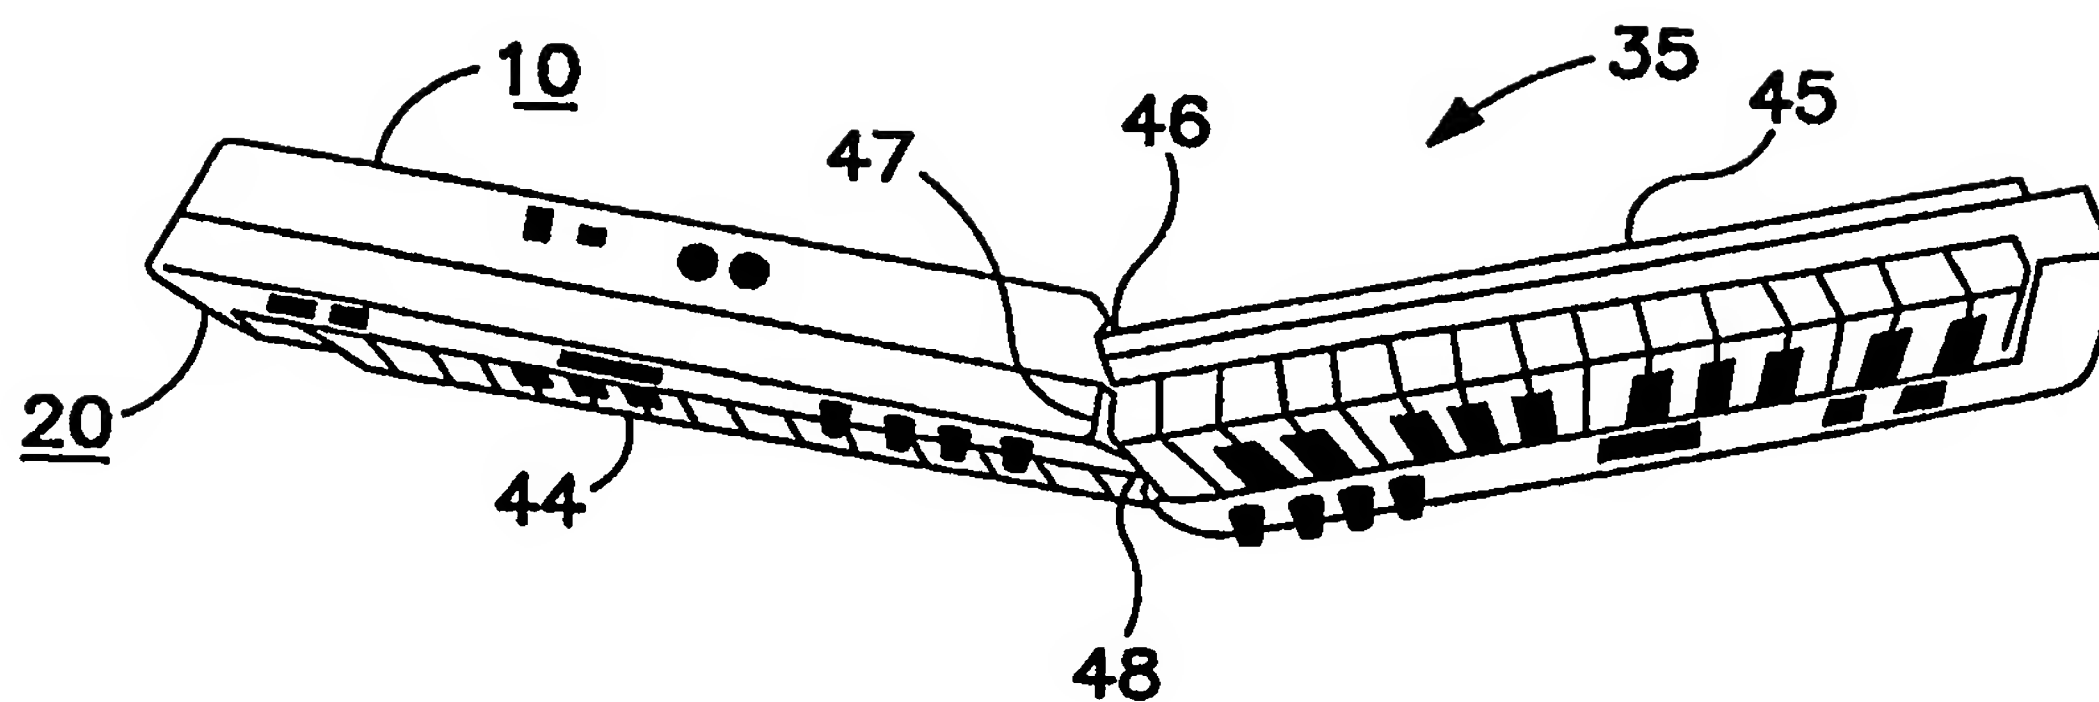


9/13

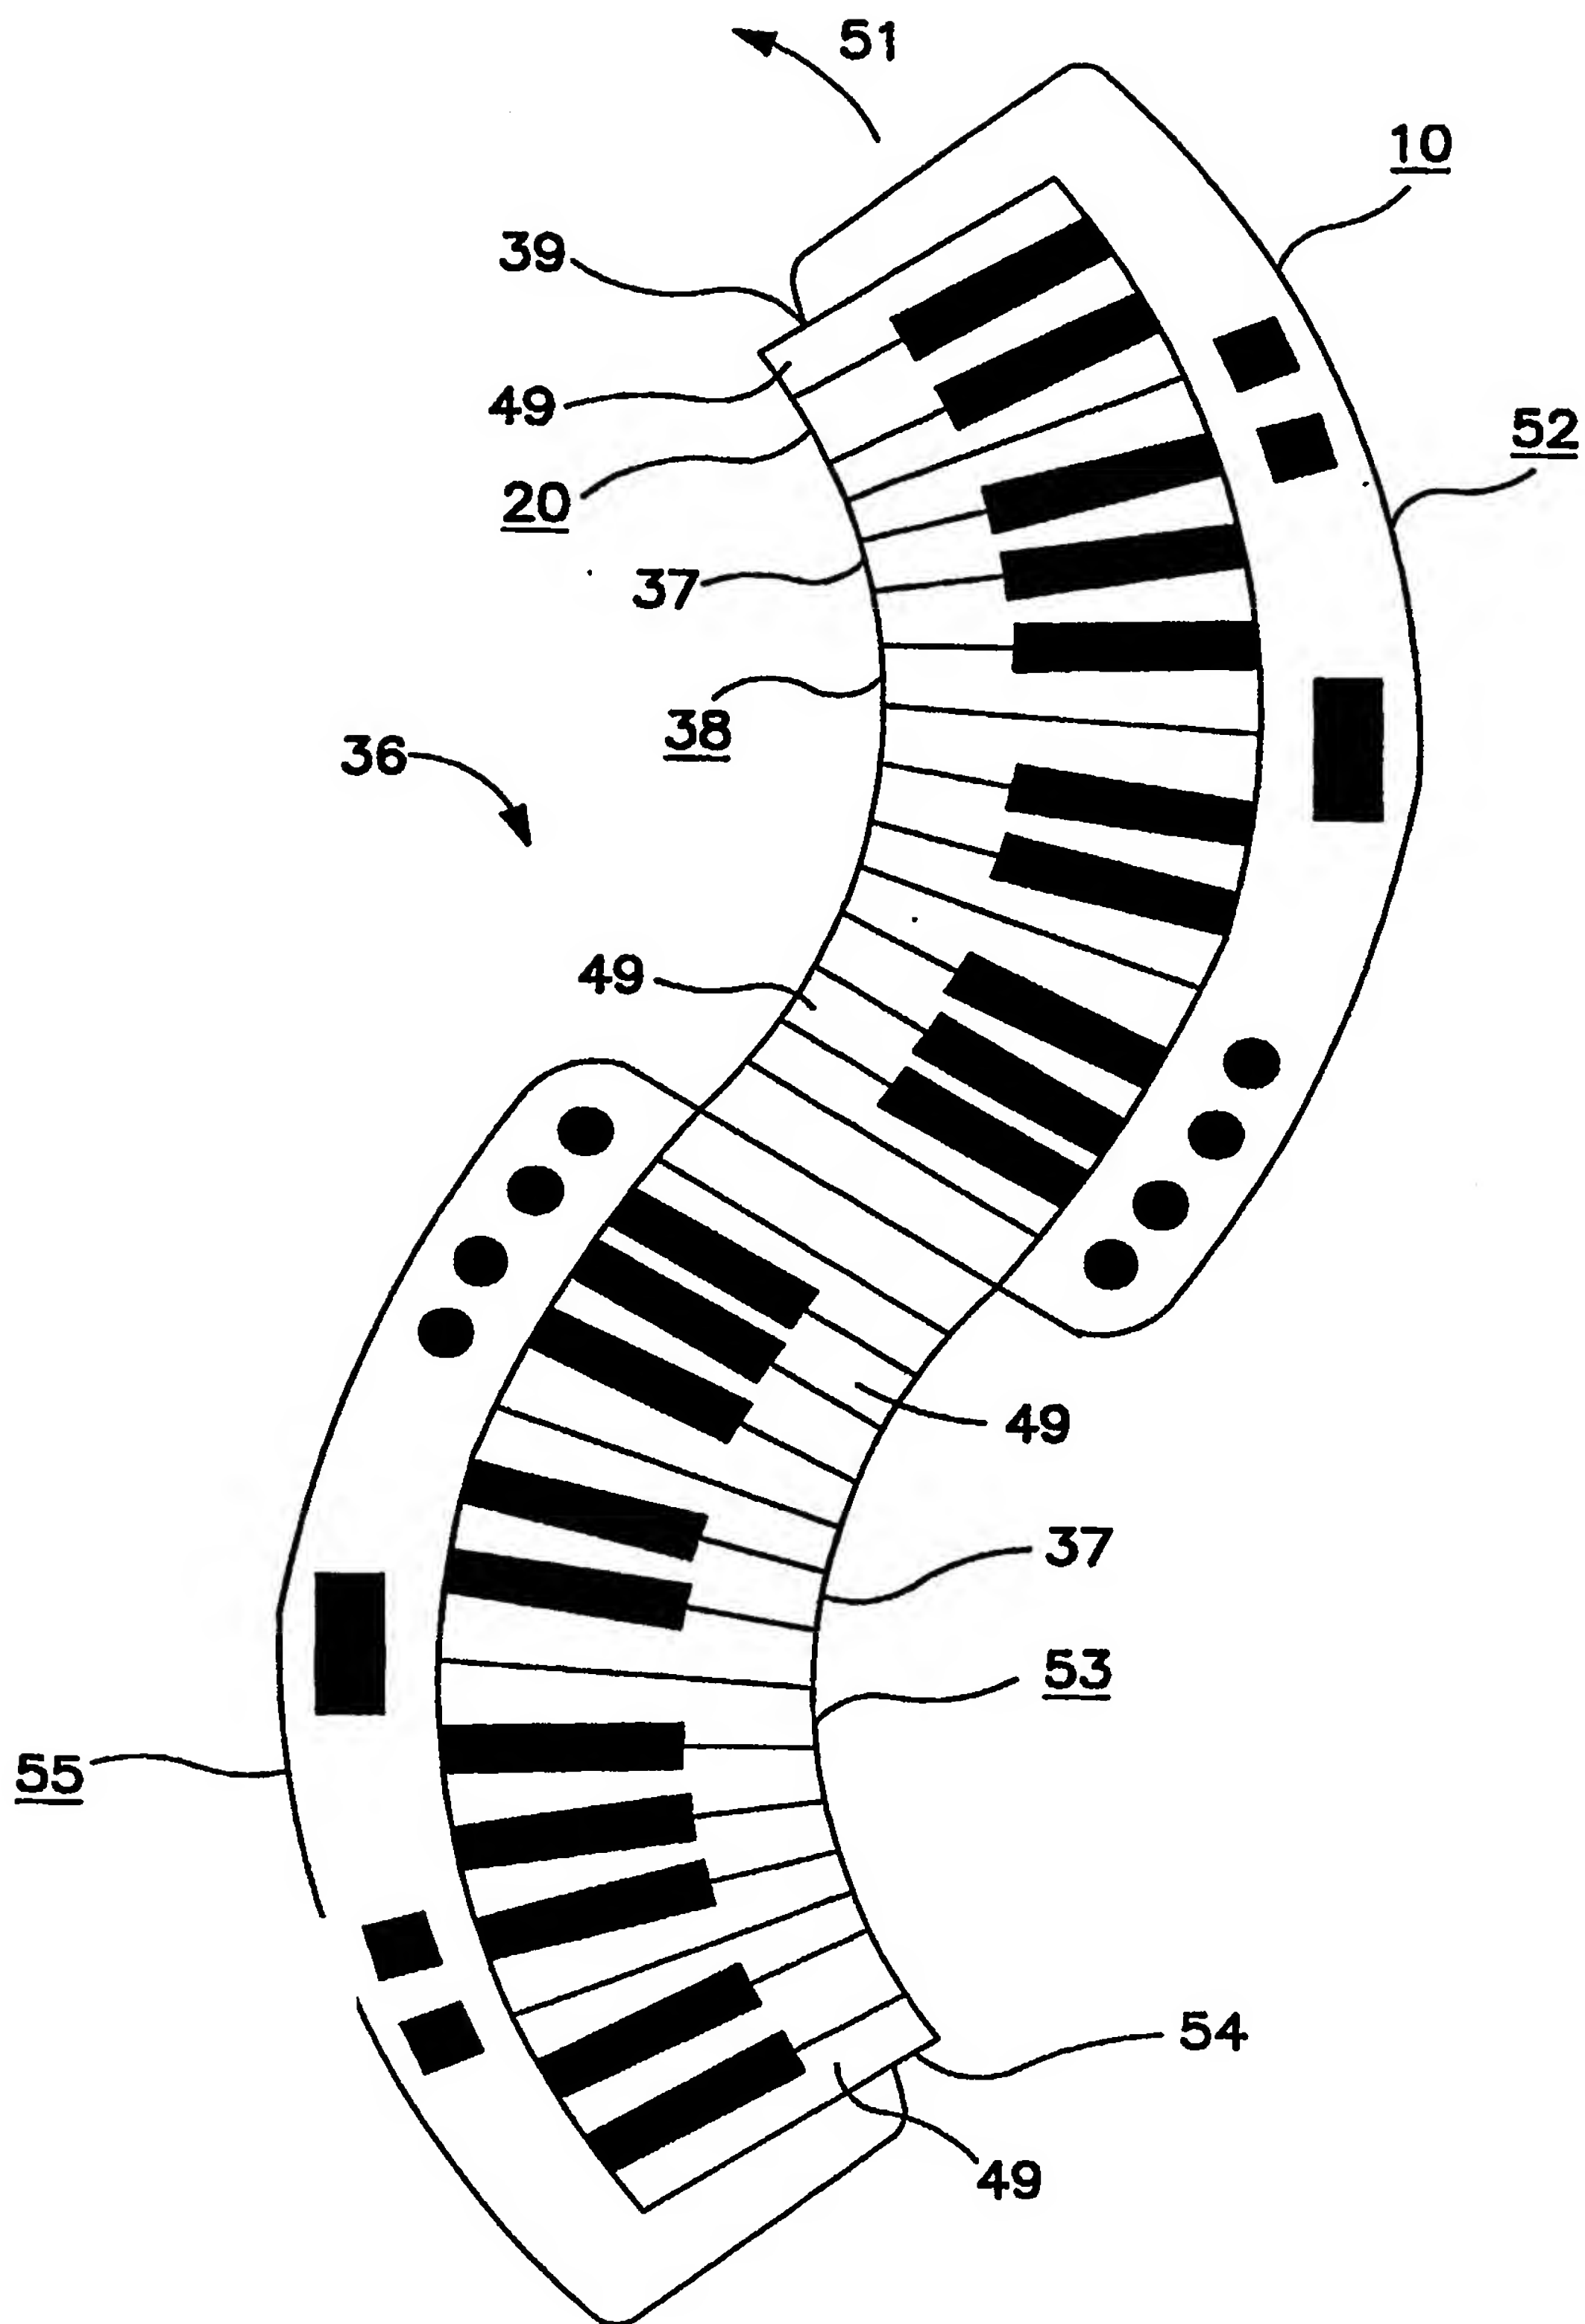

**FIG. 9**

SUBSTITUTE SHEET (RULE 26)


10/13

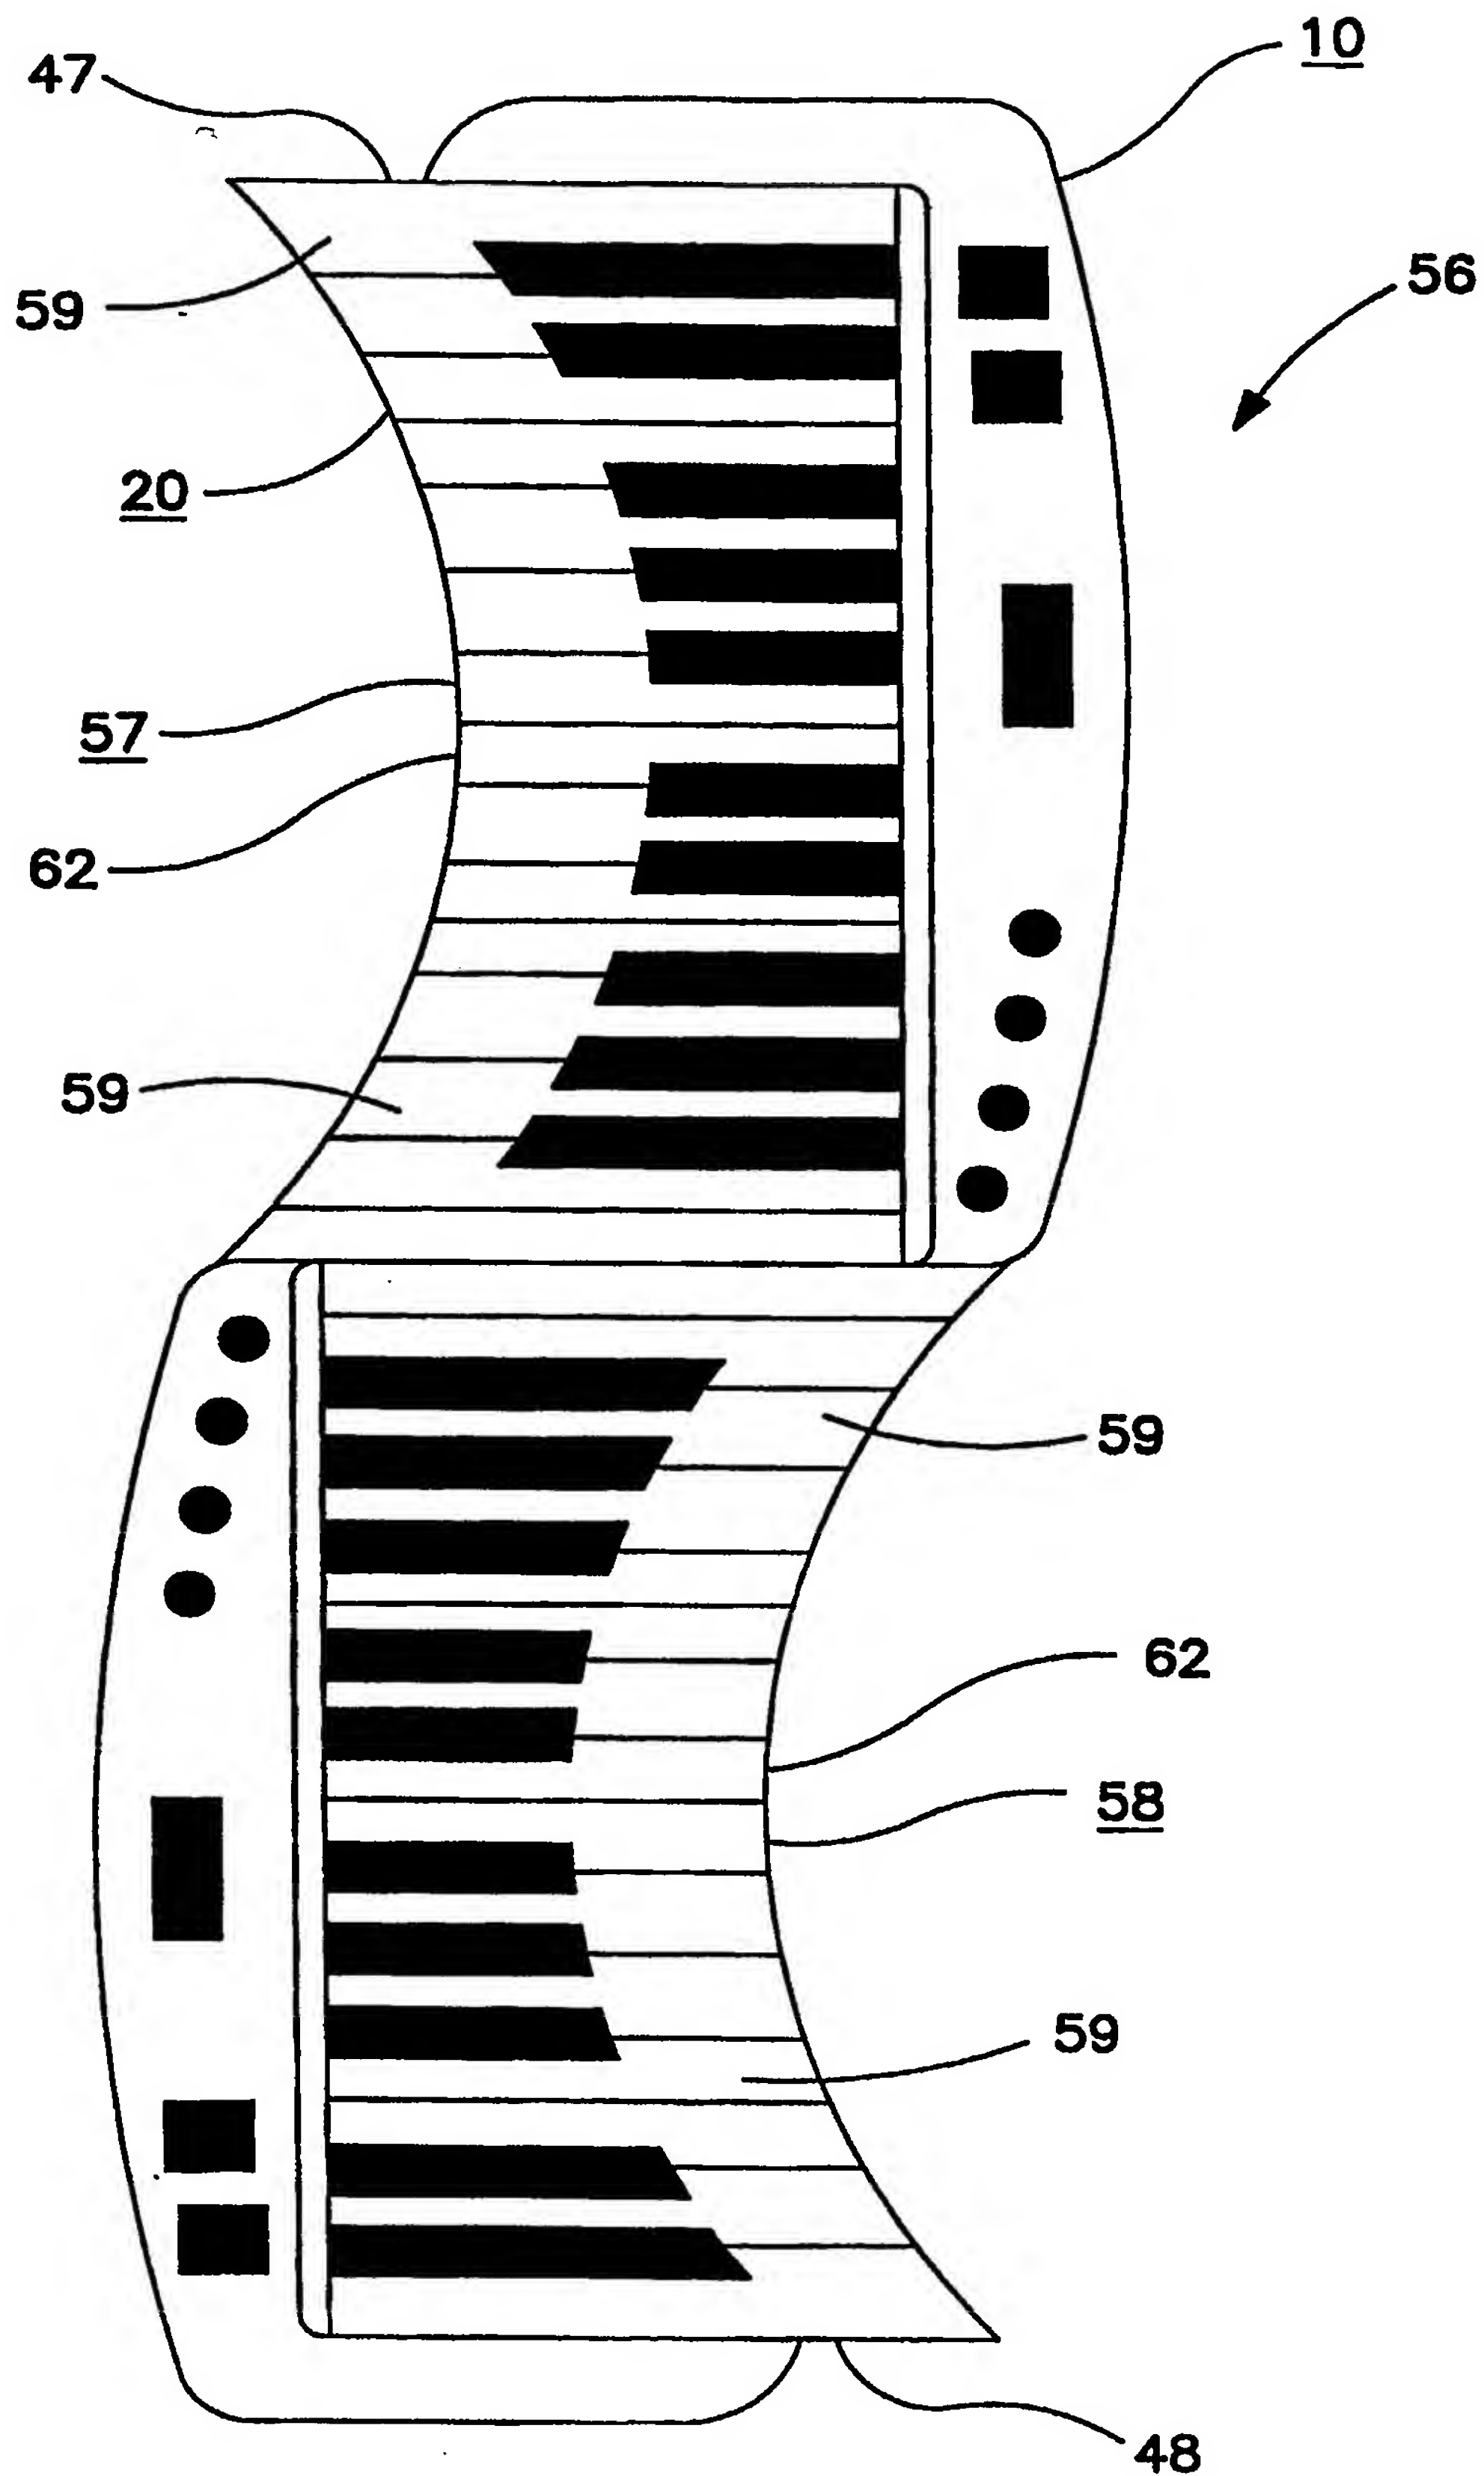

**FIG. 10**

SUBSTITUTE SHEET (RULE 26)

11/13

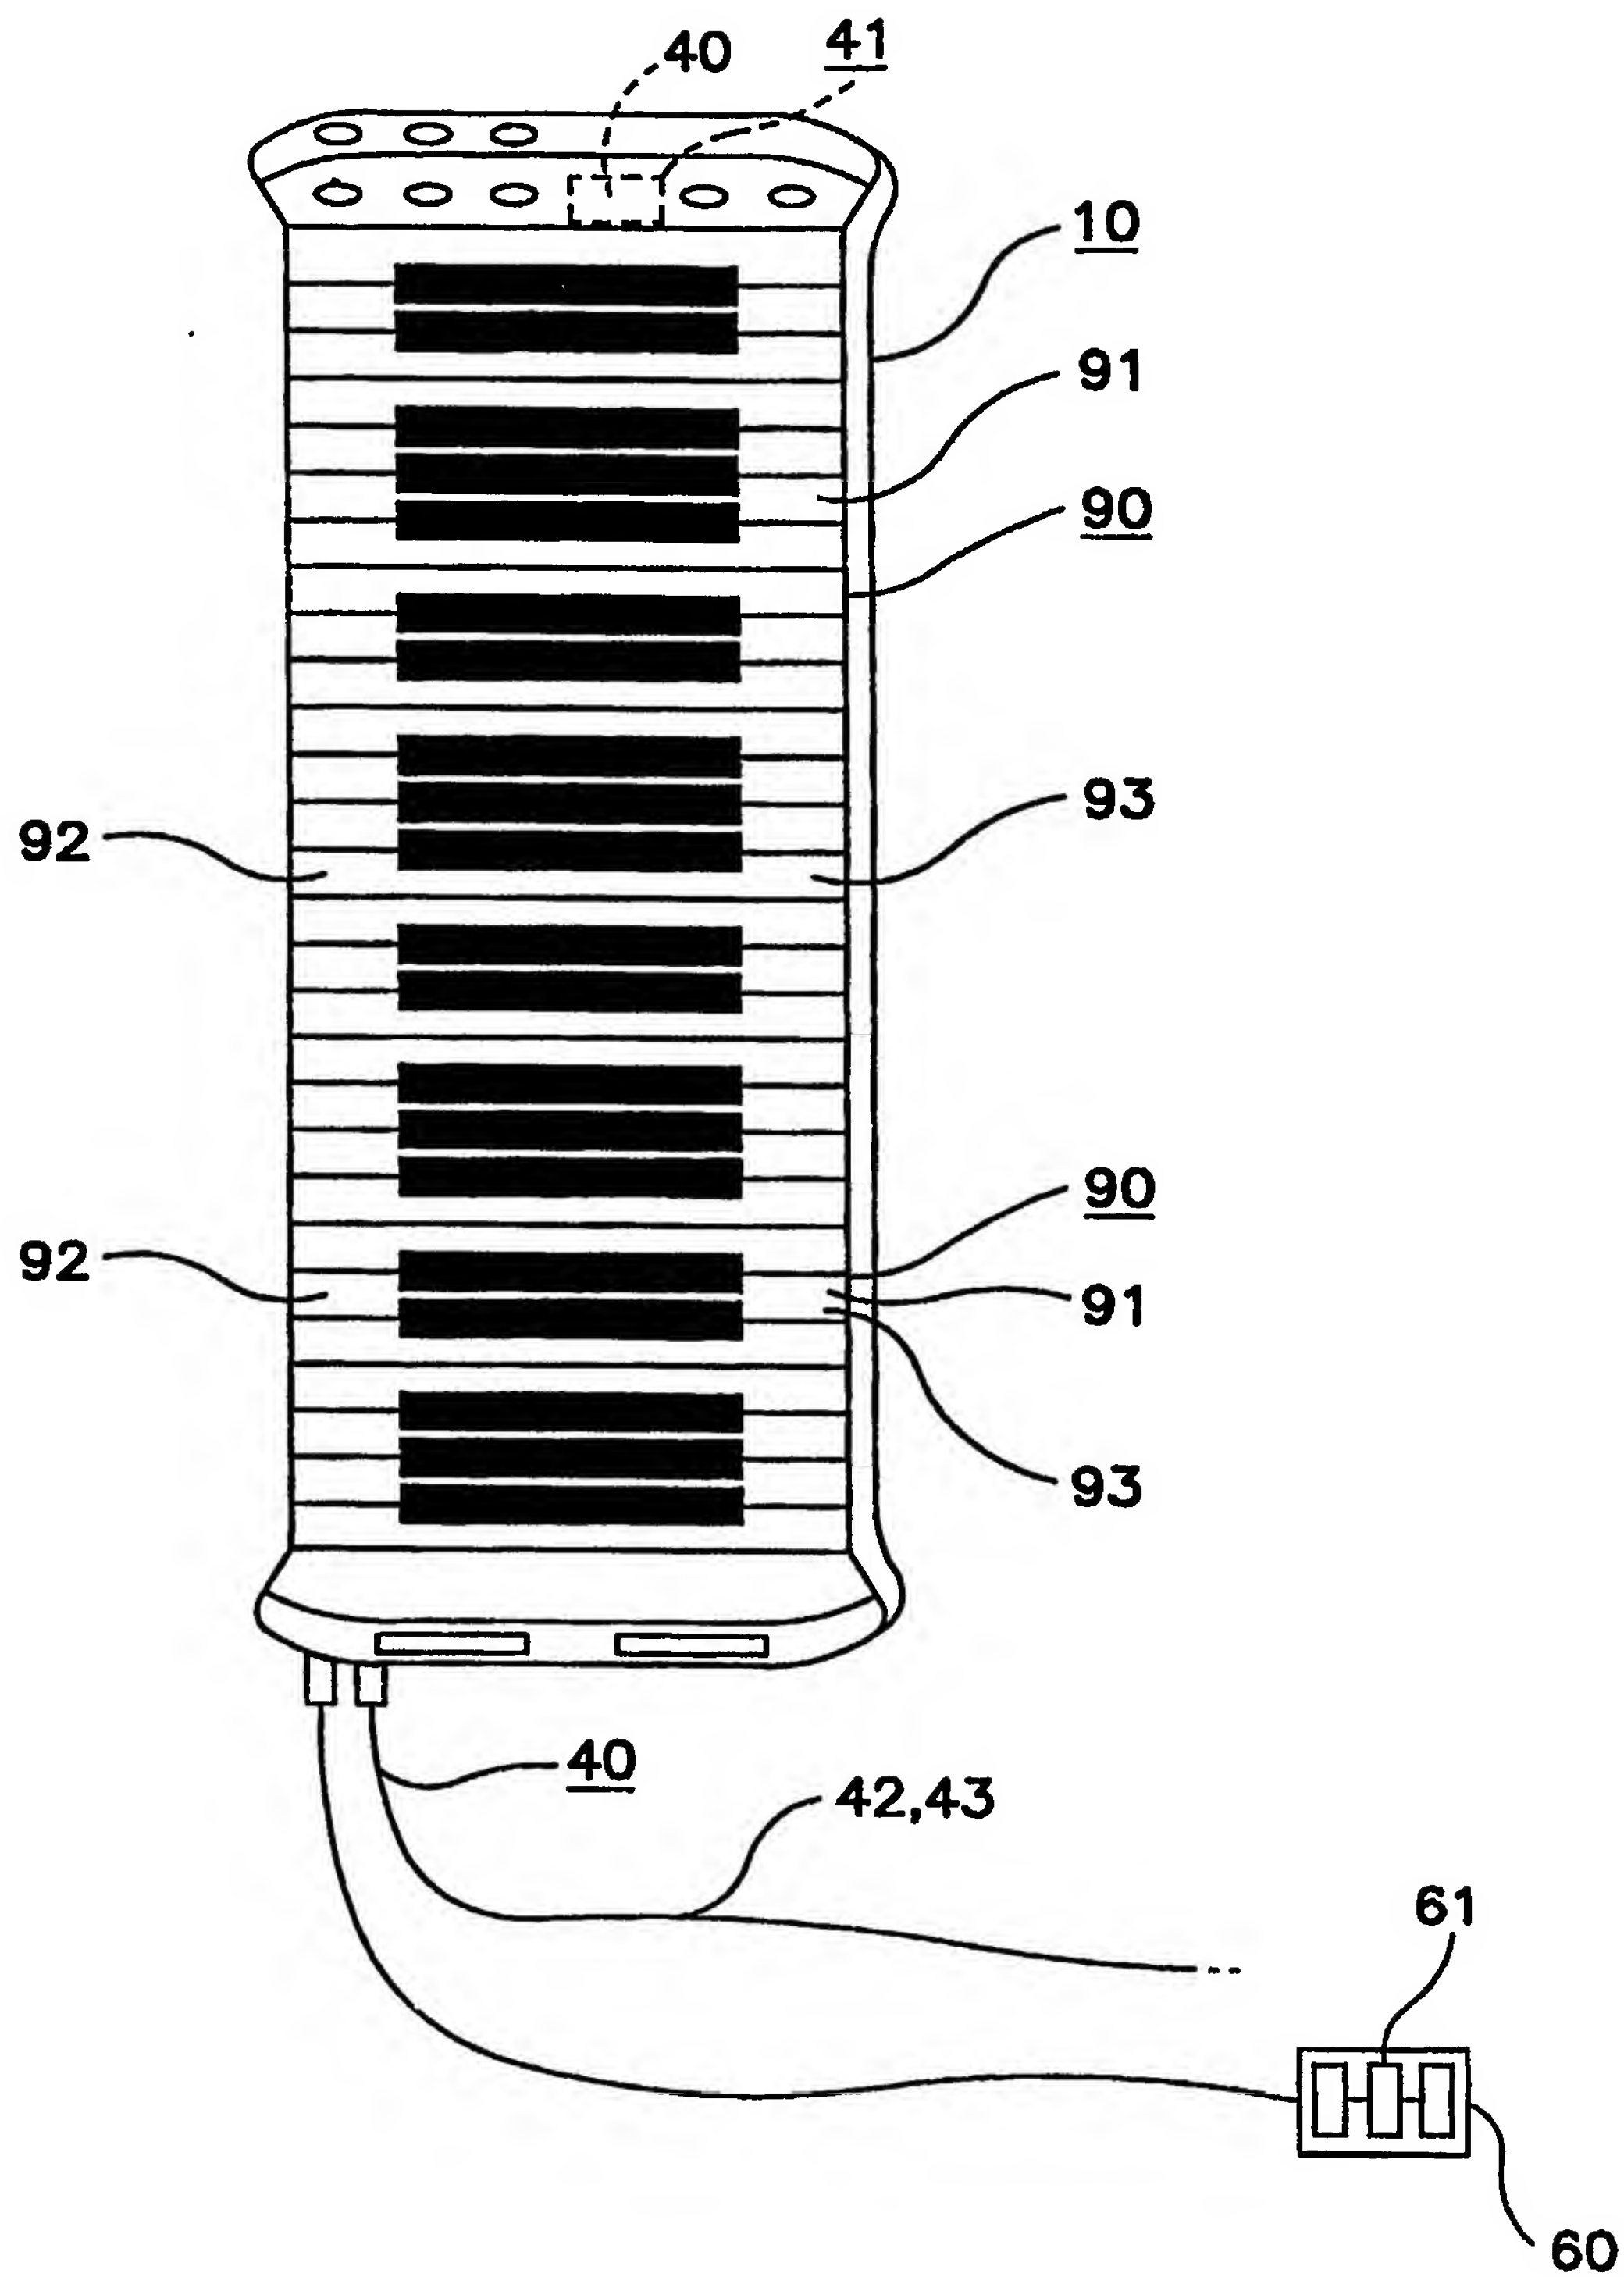

**FIG. 11**

SUBSTITUTE SHEET (RULE 26)

12/13


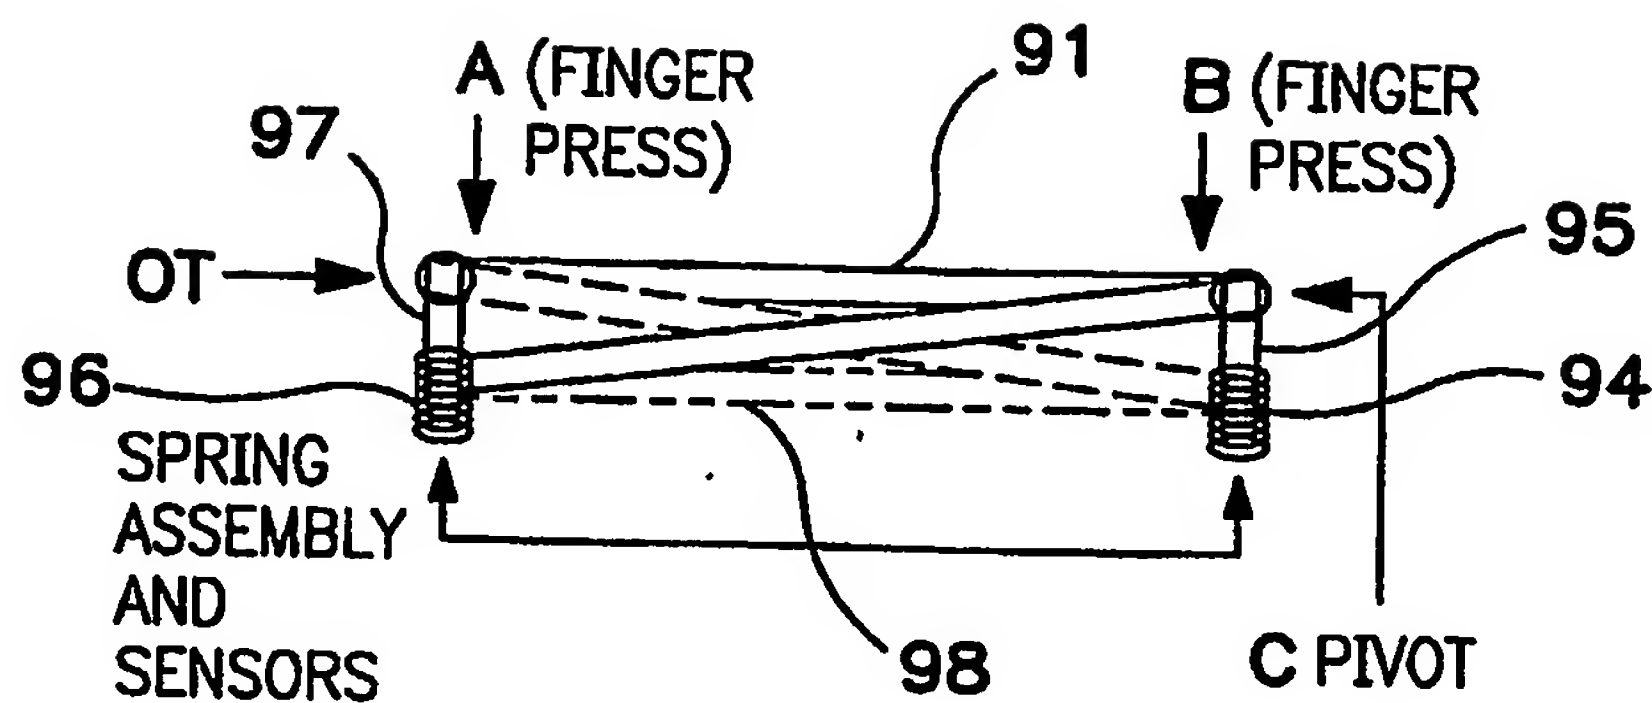


FIG. 12

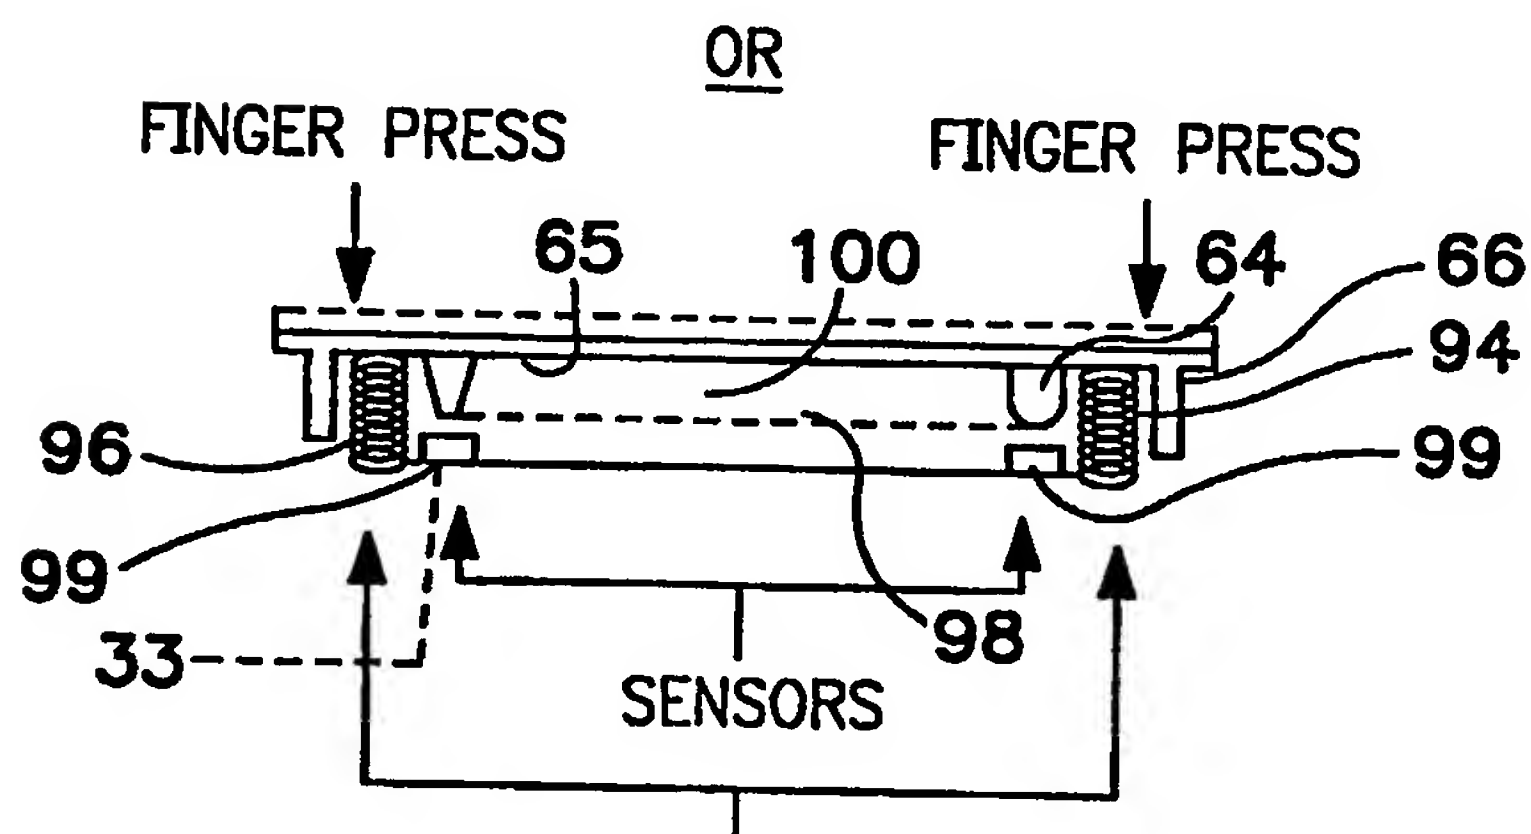

SPRINGS ARE MADE  
TO ALLOW PRESS FROM  
ABOVE, BUT ACT AS  
ANCHORS TO PIVOT  
WHEN PRESSED FROM  
OPPOSITE SIDE

- BOTH SIDES CAN BE  
PRESSED AT SAME TIME
- EACH SIDE HAS ITS OWN  
INDEPENDANT SENSOR SO IS  
SEPARATE FROM OTHER SIDE  
IN TERMS OF MIDI INFORMATION

FIG. 13

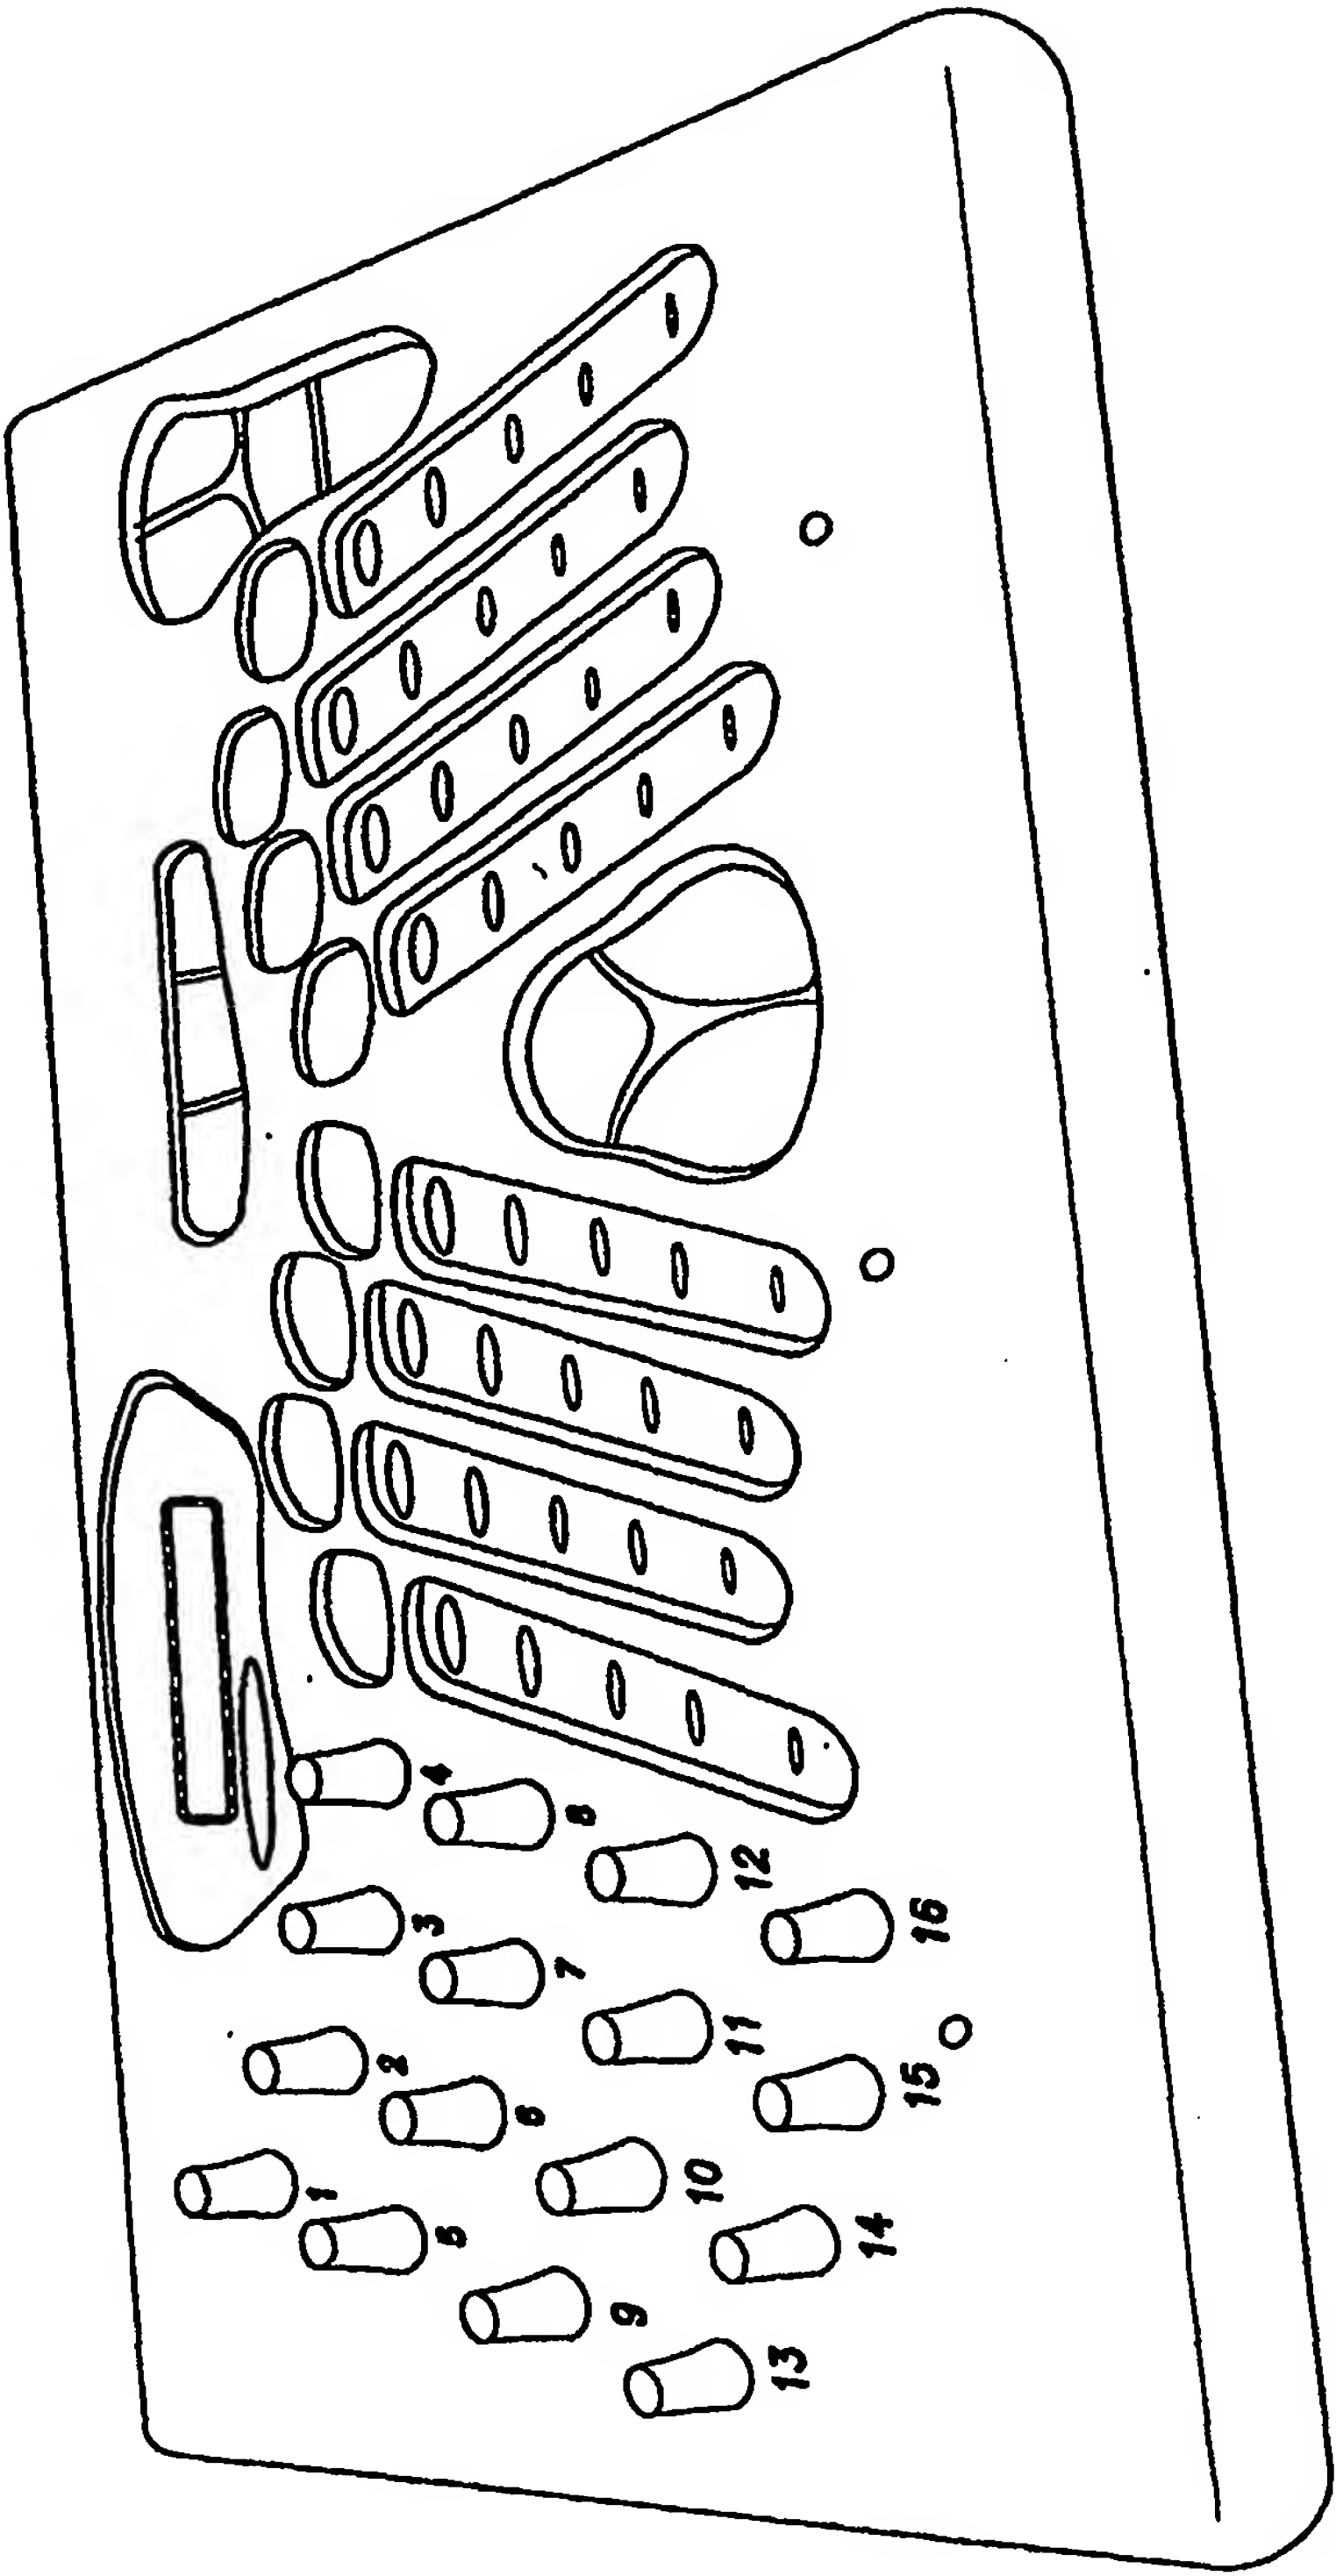


FIG. 14